



FieldSweep™ 660

SYNTHETIC TURF DEBRIS SWEEPER

FEATURES

- **Effective Field Debris Removal** – removes surface debris, lightly decompacts infill, smooths the field surface and with the optional magnet installed, removes metallic objects in a single pass
- **Returns Infill Back to The Field** – large shaker sieve surface area allows infill to fall back onto field where the straight brush reincorporates it back into the turf canopy
- **Ground-Driven Design** – can be towed behind any utility vehicle or tractor. No auxiliary power supply required. See specs for options.
- **Productive** – 65.7" (167 cm) working width and 216,810 sq. ft. (20,040 sq. meter) per hour capacity*
- **All-Steel Frame** – durable and reliable for many years of use

Efficient Debris Removal While Retaining Field Infill.

The Bullseye FieldSweep 660 is a ground-driven surface debris removal and grooming tool designed primarily for synthetic turf fields. The counter rotating paddle style brushes on the FieldSweep 660 lift surface debris and infill material to be separated on the shaking sieve. The infill is returned to the surface and brushed in while the unwanted debris continues across the sieve to the easily removable collection bins on the rear of the unit. The tine section aids in decompaction while the rear brush grooms the field surface to leave a clean, smooth and aesthetically pleasing finish. Optional accessories allow customization for different types of infill material and any tow vehicle.



*Assuming maximum operating speed of 7.5 mph (12 km/h)

©2021 The Toro Company. All rights reserved. Rev. 01/21


Call your Bullseye distributor at 800-803-8676



FieldSweep™ 660*

The Bullseye FieldSweep 660 is a ground-driven surface debris removal and grooming tool designed primarily for synthetic turf fields. The counter rotating paddle style brushes on the FieldSweep 660 lift surface debris and infill material to be separated on the shaking sieve. The infill is returned to the surface and brushed in while the unwanted debris continues

across the sieve to the easily removable collection bins on the rear of the unit. The tine section aids in decompaction while the rear brush grooms the field surface to leave a clean, smooth and aesthetically pleasing finish. Optional accessories allow customization for different types of infill material and any tow vehicle.

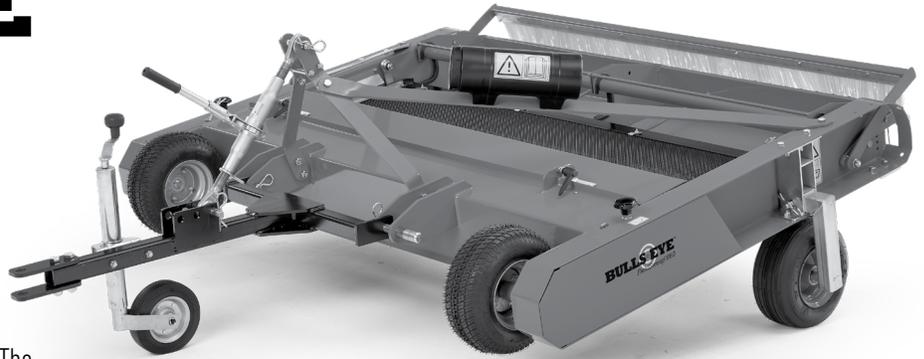

BULLSEYE FIELDSWEEP 660, MODEL 46412	
WORKING WIDTH	65.7" (167 cm)
WORKING DEPTH	Up to 0.4" (10 mm)
OPERATING SPEED	Up to 7.5 mph (12 km/h) depending on field conditions
MAXIMUM CAPACITY	216,810 sq. ft. (20,040 sq. meters) at maximum operating speed
TRACTOR REQUIREMENTS	550 lb. (250 kg) lift capacity, with 3-point category 1 hitch
UTILITY VEHICLE REQUIREMENTS	Minimum towing capacity 485 lbs. (220 kg), drawbar hitch and wheel kit required, model 46413
DEBRIS BIN CAPACITY	2X @ 1,220 cu. in. (2X @ 20 liters)
STANDARD SIEVE SIZE	0.196" x 0.196" (5 x 5 mm)
WEIGHT	485 lbs. (220 kg)
DIMENSIONS	Width 75.4" (191.5 cm) Height 29.5" (74.9 cm) Length 68.3" (173.4 cm)
WARRANTY	One-year limited warranty. Refer to the Operator's Manual for further details.

BULLSEYE FIELDSWEEP 660 ACCESSORIES	
DRAWBAR HITCH & WHEEL KIT	Allowing the ability to tow with utility vehicles, model 46413
MAGNET KIT	Able to remove metallic objects while cleaning surface debris, model 46414
0.126" SIEVE	0.126" x 0.126" (3.2 x 3.2 mm) sieve, part #144-7757
0.157" SIEVE	0.157" x 0.157" (4 x 4 mm) sieve, part # 144-7758
0.236" SIEVE	0.236" x 0.236" (6 x 6 mm) sieve, part # 144-7760

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in design, required attachments and safety features. Consult your local Toro Distributor.

