

Here is our complete range: below you will find the codes which will help you for your orders... with TEMPUS™ PRO success is guaranteed!

## TEMPUS™ PRO

PRODUCT	CODE	DESCRIPTION
	TEMP-P	Tempus Pro, 4-station control unit with external 220 VAC transformer
	TEMP-P-SM	4-station expansion module for Tempus Pro
	TEMP-P-B	4-station rear module for Tempus Pro with external 220 VAC transformer
	TEMP-MOD	Front module for programming Tempus and Tempus Pro
	TEMP-WF	Wi-Fi module for Tempus and Tempus Pro

TEMPUS™ PRO  
Another step  
forward!



Worldwide Headquarters  
The Toro Company, 8111 Lyndale Ave. So., Bloomington, MN 55420 U.S.A.  
Phone: (1) 952 888 8801 - Fax: (1) 952 887 8258  
©2022 The Toro Company. All Rights Reserved.



Count on it

[www.toro.com](http://www.toro.com)

[www.facebook.com/Toro.Company](http://www.facebook.com/Toro.Company)  
[twitter.com/TheToroCompany](http://twitter.com/TheToroCompany)  
[youtube.com/ToroCompanyEurope](http://youtube.com/ToroCompanyEurope)



TEMPUS™. Discover.

**TORO®**

## TEMPUS™ PRO

**TEMPUS™ PRO** is a step forward in the **TEMPUS™** range: with this controller you can fully control your irrigation whenever and wherever you are.


Easy to install and program, **TEMPUS™ PRO** is the ideal controller for any home application.




- **TEMPUS PRO™** can connect to the Weather broadcasting service to better manage your irrigation independently.



- Connect your **TEMPUS PRO™** to Alexa or Google Home.



- Now you can connect up to 8 **TEMPUS PRO™** with each other with a maximum limit of 48 stations!

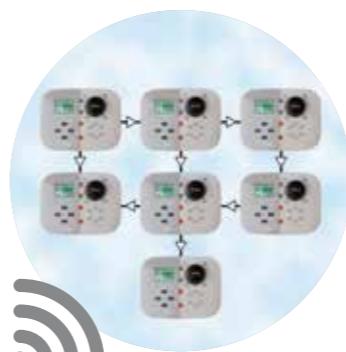

MEET  
THE MANAGER



## MAIN CHARACTERISTICS

- From 4 to 16 stations
- 4 independent programs
- 6 starts per program
- Possibility of activating rain sensor via On/Off
- The sensors can be managed in 5 different modes (Off, start, stop, skip, pause)
- Water Budget from 0% to 200%
- Pulse sensor that can be activated when the valves are not working
- "Loop" program
- Possibility of working in minutes: hours or in seconds: minutes (up to 8 min)
- Rain delay option programmable for each station (from 1 sec up to 8 min)
- Multilingual display (Italian, English, French, Spanish, German)
- Optional Wi-Fi module

## TECHNICAL DATA

- Flexible irrigation programming:
  - Daily
  - Weekly
  - Watering every other day
  - Irrigation at intervals of 1 to 30 days
- Rain suspension option programmable up to 31 days or "permanent"
- Overlapping programming
- Automatic, semi-automatic and manual start
- Permanent memory
- The pulse sensor is active even when the system is not in operation
- The internal "Super Cap" supplies the necessary power to keep the date and time even in the event of a power failure for over 24 hours (without the need for batteries).
- Help button to manage programming

## ELECTRONICS

- Absorbed power: 220 VAC, 50 Hz;
- Power output: max. per station: 24 VAC (0.5 A); Max. Total (including MV control): 24 VAC (1.0 A)
- Operating temperature: from -10° C to 60° C

## DIMENSIONS

- 186 mm x 140 mm x 67 mm (W x H x D)
- Weight: 1.5 kg