



- 3/4"
- Electric

Heavy duty. Hardworking. The Toro® 264 Series Valves are made to withstand whatever a large residential or light commercial application can dish out.



Learn more at toro.com

Features & Benefits

Heavy-Duty Toro Solenoid

Provides dependable operation and long life.

Single-Piece Robust Rubber Diaphragm


For reliable, leak-free closing.

Tough, Glass-Filled Zytel Cap And Body

Durable materials which provide years of reliable operation.



Water Management Highlight

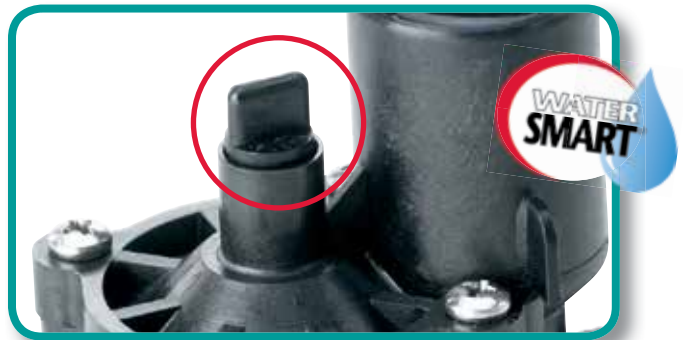

External Bleed

The external bleed allows perfect manual operation of the valve without electrically charging the solenoid. System flushing can also be accomplished using the external bleed with debris and other material being flushed out of the port.



Specifications

Dimensions

- 20mm (¾"): 75 x 100mm (3" x 4") H x W

Operating Specifications

- Recommended flow range:
 - ¾": 0,9-56,7 LPM (0.25-15.0 GPM)
- Operating Pressure
 - ¾": 0,7-10,3 Bar (10-150 psi)
- Solenoid: 24 VAC (50/60 Hz)
 - ¾":
 - Inrush: 0.25 amps, 6.00 VA;
 - Holding: 0.19 amps, 4.56 VA
 - Burst Pressure safety rating: 51,7 Bar (750 psi)

Additional Features

- Manual flow control adjustable to zero flow
- Self-cleaning, stainless steel metering pin
- External manual bleed
- 45cm (18") lead wires (electric)
- Single-piece rubber diaphragm
- Low in-rush solenoid

Options Available

- 89-7855 - Effluent Water Indicator Valve Flow Control Knob

Warranty

- Two years



264 Series Model List

Model	Description
264-06-03	20 mm (¾") Male x Male, Electric, without Flow Control

264 Series Friction Loss Data—Metric

Size	Model	LPM Flow							
		2	25	50	75	100	125	150	175
20mm (¾")	Electric	<1,0	0,1	0,4	0,7				

Specifying Information—264

264- X 6-0 X		
Valve	Body Style	Size
264	X 6	0 X
264—264 Valve	0—Male Thread x Male Thread	3—(¾")
Example: A ¾" electric 264 Series Valve without flow control and Male x Male valve would be specified as: 264-66-03		

toro.com

Worldwide Headquarters
 The Toro Company
 8111 Lyndale Ave. So.
 Bloomington, MN 55420 U.S.A.
 Phone: (1) 952 888 8801
 Fax: (1) 952 887 8258

Printed in U.S.A.
 ©2016 The Toro Company.
 All Rights Reserved.
 GB 200-XXXXNA Electronic file only.



facebook.com
 twitter.com/TheToroCompany
 youtube.com/ToroCompanyEurope



Count on it.