



AccuraSeed™ 620

SEEDER

FEATURES

- **Efficient Seed Placement** – seeds are dropped directly into the soil, protecting them from wind keeping them moist, resulting in increased germination
- **Floating Twin Disc Planting System** – follows ground undulations resulting in fewer bare areas once seed establishment begins
- **Seed Collection Tray** – catches seed for weighing during easy calibration process
- **Ground-Driven Design** – fewer moving parts results in reduced maintenance and lower cost of ownership
- **Efficient Working Speed** – up to 7.5 mph (12 km/h) for increased productivity



Fast, Efficient Overseeding with Great Results.


The AccuraSeed 620 plants grass seed directly into the ground, providing outstanding seed-to-soil contact and unmatched germination. The simple, yet effective twin discs open a slit for seed placement allowing for multiple passes without disrupting dormant or winter damaged surfaces. The large capacity hopper with windows to monitor seed level allows for less frequent refills, resulting in greater productivity. A proven seed size adjustment and metering design allows the machine to provide an infinite range of seeding rates with all seed types, from very large to the very smallest of seed varieties.





AccuraSeed™ 620*

The AccuraSeed 620 plants grass seed directly into the ground, providing outstanding seed-to-soil contact and unmatched germination. The simple, yet effective twin discs open a slit for seed placement allowing for multiple passes without disrupting dormant or winter damaged surfaces. The large capacity hopper with windows to monitor seed level allows for less frequent refills, resulting in greater productivity. A proven seed size adjustment and metering design allows the machine to provide an infinite range of seeding rates with all seed types, from very large to the very smallest of seed varieties.

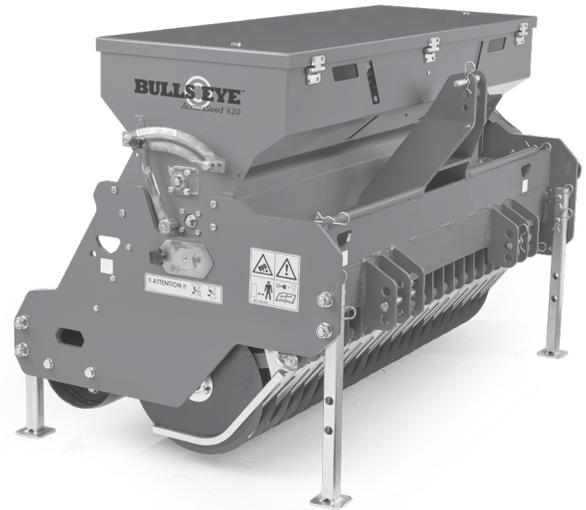

BULLSEYE ACCURASEED 620, MODEL 46430	
WORKING WIDTH	62" (157.4 cm)
SEED DELIVERY RATE	Infinitely adjustable based on seed size and desired rate
SEEDING DEPTH	Adjustable to maximum 0.8" (2 cm)
SPACING	2.95" (75 mm)
HOPPER CAPACITY	9.7 cubic feet (276 liters)
WORKING SPEED	Up to 7.5 mph (12 km/h)
DISC PAIRS QUANTITY	21
TRACTOR REQUIRED	45 hp (33.5 kW), minimum lift capacity 2,866 lbs. (1300 kg)
3-POINT CONNECTION	Category 2
WEIGHT	2,596 lbs. (1178 kg)
DIMENSIONS	Width 74" (187.9 cm) Height 57" (144.7 cm) Length 39" (99 cm)
WARRANTY	One-year limited warranty. Refer to the Operator's Manual for further details.

BULLSEYE ACCURASEED 620 ACCESSORIES	
DRAWBAR HITCH & WHEEL KIT	Requires hydraulics and 1,400 lb (636 kg) tongue weight capacity, model 46431
WEIGHT KIT	Single 44 lb. (20 kg) weight, holds up to 18, model 46432

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in design, required attachments and safety features. Consult your local Toro Distributor.

