




GreensPro[®] 1260

GREENS ROLLER

F E A T U R E S

- *Overlapping smoothing rollers eliminate crease marks for a uniform appearance*
- *Operator platform is fully adjustable for unmatched operator comfort and safety.*
- *Independent, articulating smoothing heads follow undulations, preserving natural contours*
- *Light tongue weight makes maneuvering simple*
- *Converting from roll to transport is a breeze with the wheel caddy system, and the remarkably light tongue weight makes coupling and de-coupling from the tow vehicle a snap.*
- *Hydraulic motor drive for ease of operation and reduced maintenance*

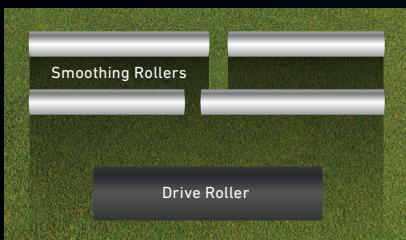

Offset smoothing roller design for uniform greens appearance and playability

Delivering fast, smooth greens. Easily.

The GreensPro 1260 is in a league of its own, delivering exceptionally smooth and fast greens. The split, overlapping, contour-following smoothing rollers follow undulations delivering exceptionally smooth putting surfaces. The operator platform is fully adjustable for unmatched comfort and operator safety. The hitch system featuring a QuickLatch coupler makes coupling and de-coupling from the tow vehicle for transporting from green to green unbelievably quick and simple. Direct hydraulic motor drive for ease of operation and reduced maintenance. Exceptional greens rolling and ultimate usability.

That's the GreensPro 1260.

[toro.com](https://www.toro.com)





GreensPro® 1260

The Toro GreensPro 1260 riding greens roller is the perfect rolling tool for fine sporting turf such as golf greens, bowling greens and tennis courts. Turf that requires a smooth, high performance surface for optimum playing will benefit from precision greens rolling with the GreensPro 1260.



GREENSPRO 1260, MODEL 44913*	
ENGINE	Honda® GX200 5.5 hp (4.1 kW) @3600 RPM, air-cooled, 4-stroke OHV; mechanically governed.
FUEL	Unleaded gas
TRANSMISSION	Hydrogear PG Pump
DRIVE	Parker hydraulic motor to drive roller
SMOOTHING ROLLS	3.44" (87.5 mm) diameter - 4 split rollers. Overlapping twin steering heads.
TRACTION DRIVE ROLLER	7.24" (183.9 mm) diameter vulcanized rubber coated cylinder, 31.5" (80 cm) long
ROLLING WIDTH	47.2" (120 cm)
GROUND SPEED	Roll: 0-8 mph (0-12.8 km/h) in either direction
CONTROLS	Tilt steering wheel, directional foot pedals, parking brake, engine stop switch, recoil, choke, fuel shut off, light switch, and hourmeter
CONTOUR FOLLOW	Yes
GROUND PRESSURE	3.75 PSI (0.26 Bar)
STEERING	Wheel, adjustable tilt to 40°
SEAT	High-back, adjustable with standard armrests
TRAILER	Integrated with QuickLatch towing system
LIFTING TIRES	16 x 6.50 - 8
LIFTING TIRE PRESSURE	15 PSI (1.03 Bar)
	OVERALL DIMENSIONS (STORAGE)
WIDTH	48" (122 cm)
LENGTH	63" (160 cm)
HEIGHT	68" (173 cm)
WEIGHT	679 lbs. (309 kg)
WARRANTY	Two-year limited warranty. Refer to operator's manual for further details.

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.

