


PROLINE SERIES

MID-SIZE MOWERS

TIME SAVER. MONEY MAKER.

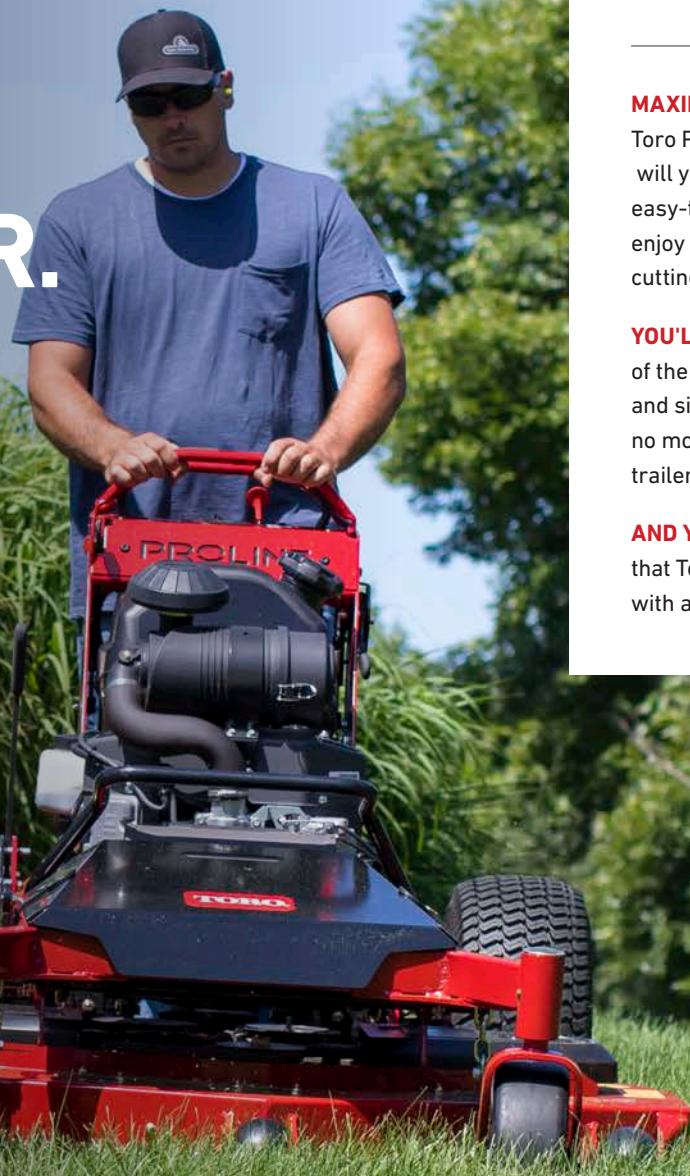

Contractors know every second not mowing is a lost opportunity, and training your crew on new equipment can cause unnecessary setbacks in time and money.

MAXIMIZE YOUR EFFICIENCY with the Toro PROLINE mid-size mowers. Not only will your crew be mowing in no time with easy-to-learn controls, but you'll also enjoy top-line reliability and professional cutting performance.

YOU'LL LOVE THE CONVENIENCE of the 2-wheel sulky, which rotates 360° and simply folds away when not in use; no more attaching and removing when trailering! Sold separately.

AND YOU CAN REST EASY knowing that Toro stands behind its mowers with a 3-year, 750-hour warranty.



COMPATIBLE

PROLINE SERIES																
	44410		44424		44427		44430		44436		44448		44454		44460	
POWER SYSTEM	44409 CARB		44423 CARB													
Commercial Engines at 3600 RPM*	14.5 hp Kawasaki® FS		▶ 15 hp Kawasaki FS		▶ 18.5 hp Kawasaki FS		▶ 22 hp Kawasaki FS		15 hp Kawasaki FX				▶ 22 hp Kawasaki FX			
Starter	Electric								Electric							
Drive Tires	18"				▶ 20"				18"				▶ 20"			
Caster Tires	9"				▶ 11"				9"				▶ 11"			
Fuel/Capacity	Gas / 5 Gal (18.9 L)								Gas / 5 Gal (18.9 L)							
Control System	Twin Lever								Twin Lever							
Transmission	ZT-2800								▶ ZT-3100							
Hour Meter	Standard								Standard							
Maximum Forward Speed	7 mph (11.3 km/h)								7 mph (11.3 km/h)							
Brake System	Integrated Parking Brake								Integrated Parking Brake							
MOWING DECKS																
Deck Size	36" (91.4 cm)		▶ 48" (121.9 cm)		▶ 54" (137.2 cm)		▶ 60" (152.4 cm)		36" (91.4 cm)		▶ 48" (121.9 cm)		▶ 54" (137.2 cm)		▶ 60" (152.4 cm)	
Cutting Deck	10-Gauge Steel								7/10-Gauge Steel							
Bullnose Bumper	Standard								Standard							
Rubber Discharge Chute	-								▶ Standard							
Deck Lift Assist	Standard								Standard							
Spindle Housings	8" Cast Aluminum								8" Cast Aluminum							
Spindle Bearings	Maintenance-Free								Maintenance-Free							
Cutting Height	1.5" – 4.5" (3.8 – 11.4 cm)								1.5" – 4.5" (3.8 – 11.4 cm)							
Blades	.204" Heat-Treated Steel								.204" Heat-Treated Steel							
Blade Tip Speed	18,500+ ft./min.								18,500+ ft./min.							
Belt Construction	Aramid Fiber V-Belt								Aramid Fiber V-Belt							
Anti-Scalp Rollers	Standard								Standard							
WEIGHTS AND MEASUREMENTS																
Weight	580 lbs.	263.1 kg	639 lbs.	289.8 kg	648 lbs.	294.9 kg	693 lbs.	314.3 kg	608 lbs.	275.8 kg	669 lbs.	303.5 kg	695 lbs.	315.2 kg	730 lbs.	331.1 kg
Height	45"	114.3 cm	46"	116.8 cm	46"	116.8 cm	46"	116.8 cm	45"	114.3 cm	46"	116.8 cm	46"	116.8 cm	46"	116.8 cm
Deck Clearance Width	37"	94.0 cm	49"	124.5 cm	55"	139.7 cm	61"	154.9 cm	37"	94.0 cm	49"	124.5 cm	55"	139.7 cm	61"	154.9 cm
Deflector Width	51"	129.5 cm	63"	160.0 cm	69"	175.3 cm	75"	190.5 cm	51"	129.5 cm	63"	160.0 cm	69"	175.3 cm	75"	190.5 cm
Length	77"	195.6 cm	80"	203.2 cm	80"	203.2 cm	83"	210.8 cm	77"	195.6 cm	80"	203.2 cm	80"	203.2 cm	83"	210.8 cm

* The gross horsepower of these gasoline engines was laboratory rated at 3600 rpm by the engine manufacturer in accordance with SAE J1995. As configured to meet safety, emission and operating requirements, the actual engine horsepower on these mowers will be significantly lower.

▶ = Step Up Feature



DRIVE WITH EASE

Shred grass in no time with the easy-to-learn twin-lever controls and drive assist with three settings.



MOWING MUSCLE

Ensure you never lose a job because of broken equipment with a reliable Kawasaki engine that drives .204" blades for a gorgeous, professional cut.



MADE TO LAST

Your Toro is also built to take on years of rough rides with a bullnose bumper and 20" wheels with curb clearance.



QUICK ADJUSTMENT

Changing cut lengths on the go is a snap with a single-point height of cut adjustment.



NO-HASSLE SULKY

The 2-wheel sulky simply folds away, meaning no need to attach and remove it when trailering. Sold separately.