

TORO®

RXC SERIES CONTROLLER



The RXC Controller is a powerful, reliable, and contractor-friendly irrigation solution designed to streamline water management. With modular expandability, available Wi-Fi connectivity, and advanced flow monitoring, RXC offers unmatched flexibility and control. Built for long-term durability, it ensures consistent performance while simplifying setup and operation for irrigation professionals. Smart features like seasonal adjustments, predictive weather-based scheduling, and intuitive programming make RXC the go-to choice for contractors looking for efficiency and reliability in every installation.

FEATURES & BENEFITS

Modular and Scalable Design

The RXC Controller starts with a 6-station base and expands in 4-station modules (up to 22 stations), allowing flexible irrigation as landscapes grow.

Wi-Fi Connectivity for Remote Management

An optional Wi-Fi module enables wireless setup and control via Toro Oasis® irrigation management software, allowing easy adjustments and monitoring anytime, anywhere.

- EPA WaterSense® compliant when connected to Oasis, automatically optimizing runtimes year-round.
- Dry-out delay of up to 3 days after rainfall.

Optional Advanced Flow Monitoring & Automatic Shutoff

Compatible with Toro & Irritrol® flow sensors, RXC learns valve flow patterns to provide real-time monitoring, automatic shutoff for overflow/underflow, and alerts to prevent water waste and landscape damage.

User-Friendly Interface

A backlit display and intuitive dial navigation simplify programming.

Reliable & Smart Watering Features

Backed by a 5-year warranty, RXC ensures long-term durability with WaterSense compliance, seasonal adjustments and grow-in functionality for efficient water use.



Programming Features

- ✓ Six programs with six start times per program
- ✓ Grow-In program is settable for up to 90 days and automatically reverts to base irrigation program
- ✓ Station runtimes from one minute to eight hours
- ✓ 7-day a week, odd, even, or interval water days
- ✓ Cycle and soak
- ✓ Multi-manual station or program operation
- ✓ Programmable well-recovery, station, or pump start delays from 1 seconds to 9 hours
- ✓ Timed water off from one to fourteen days
- ✓ Operate up to 3 valves simultaneously
- ✓ Compatible with normally-closed rain sensors
- ✓ Automatic short detection for circuit protection and faster troubleshooting
- ✓ Diagnostic station test measures and displays current draw from the solenoid
- ✓ Non-volatile program memory
- ✓ Date and time retention for up to 10 years with no batteries needed

Hardware Features

- ✓ Indoor and outdoor lockable cabinet with internal transformer and pigtail cord
- ✓ 6-station base; expandable to 22-stations with 4-station hot-swappable modules
- ✓ Powerful 1.25 mA transformer can power up to 3 standard solenoids at once
- ✓ Red LED next to display lights in the event of an alert
- ✓ UV-resistant plastic and includes standardized key used on many of the most popular controllers

Wi-Fi Connectivity Plug-In

Receiver installs easily inside the controller for seamless wi-fi connectivity. Enables connection to Toro® Oasis® irrigation management software.

COMPATIBLE ACCESSORIES

Model	Description
RS1000	Wireless Rain Sensor
RSF1000	Wireless Rain/Freeze Sensor
RS500	Wired Rain Sensor
Add-ons and Accessories	
TFS-050	Flow Sensor, ½ Inch, Plastic Tee
TFS-075	Flow Sensor, ¾ Inch, Plastic Tee
FS-B100	Flow Sensor, 1 Inch, Brass Tee
FS-B125	Flow Sensor, 1 ¼ Inch, Brass Tee
FS-B150	Flow Sensor, 1 ½ Inch, Brass Tee
FS-150	Flow Sensor, 1 ½ Inch, Plastic Tee
FS-10	Flow Sensor, 1 Inch, Plastic Tee
FS-15	Flow Sensor, 1 Inch, Plastic Tee

SPECIFICATIONS

Electrical

Transformer Input: 120VAC, 60HZ
Transformer Output: 24VAC, 1.25A
Transformer Maximum Output: 24VAC, 1.25A
Output per Station: 24VAC, 0.5A
Temperature Rating: 14 - 140 degrees Fahrenheit

Temperature

Temperature Rating: 14-140 degrees Fahrenheit

WIFI Specifications

- Standard IEEE 802.11 b/g/n/2.4 GHZ WiFi
- Certification: - FCC Part 15C
- ECES-003B/NMB-003-B

Dimensions


- W: 11 1/4", H: 7 3/4", D: 4 1/4"

Warranty

- Five years

Software Features

Oasis revolutionizes residential irrigation control with simple setup and handoff, one-stop client management and proactive insights that create opportunities for your business. Real-time data and alerts help you deliver responsive service, while the free Oasis app puts water-saving control at your fingertips.

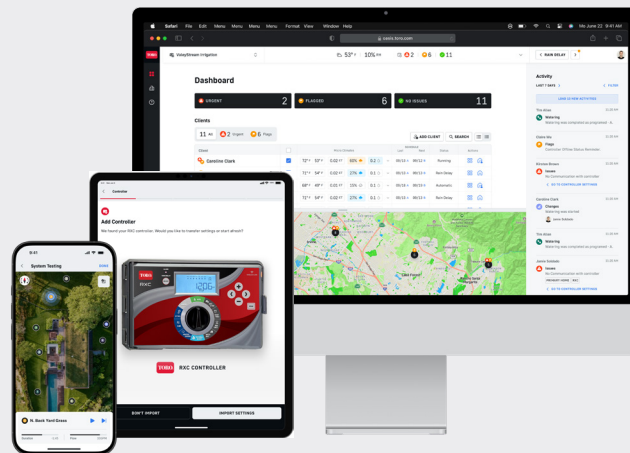

RXC SERIES MODEL LIST

Model	Description
RXC6	6 – Station Base Indoor/Outdoor Controller
RXC6-WIFI	6 – Station Base Indoor/Outdoor Controller with WIFI
Add-ons and Accessories	
RXC4-MOD	RXC 4 - Station Expansion Module
RXC-WIFI	RXC WIFI Module
RXC-FLOW	RXC Flow Module



www.toro.com

The Toro Company • Precision Irrigation Business • 5825 Jasmine St. Riverside, CA • 92504 • 877-345-8676

Specifications subject to change without notice. For more information, contact your local Toro distributor.

©2026 The Toro Company. All rights reserved. P/N 26-1305-IRC Rev. C - 9/26