

TURFMASTER® HDX

30" HEAVY-DUTY MOWERS

60V^{MAX} BATTERY

GREEN
INDUSTRY
Pros
EDITOR'S
CHOICE AWARD
2025



A few extra inches of deck can save a lot of mowing time—which is exactly why we built the TurfMaster. This machine covers more ground in less time than smaller models, yet it's also easy to handle. Every component from top to bottom is made for heavy use in rough conditions, from curbs to trailers to multiple operators. It offers professional-grade toughness, professional-quality cut, and a major boost for your productivity.

FINISH THE JOB FASTER

With the highly productive 30" deck.

SIMPLIFY OPERATION

With a conventional walk-behind design that's easier to use and control compared to other mower styles.

GET COMMERCIAL-GRADE POWER

For heavy use with the Kawasaki® or Kohler® engines with spin-on oil filter and dual element air filter.

EXTEND MOWING TIME

Between refueling with the large one-gallon gas tank.

GAIN EXCELLENT CONTROL

With the easy-to-operate, two-bail control system.

DISENGAGE BLADES

Without shutting down the engine, thanks to the Blade Brake Clutch (BBC) system.

POWER THROUGH

The toughest jobs with a battery-powered mower made for contractors. The same proven Turfmaster platform meets the quiet, commercial-grade battery power of Toro's Revolution series.

CASTER WHEEL FRONT END SET UP Locking capability to aid with holding straight lines. (Model 22236 Only)



COMMERCIAL-GRADE WHEELS

Rubber tires with co-polymer wheels feature precision ball bearings for long life with less downtime and lower replacement costs.



BLADE BRAKE CLUTCH (BBC)

Allows the operator to disengage the blades without shutting down the engine. Saves time restarting when you have to step away momentarily to move obstacles or empty the bag.



2-POINT HEIGHT OF CUT

Heavy-duty 2-point height of cut (HOC) system makes it easy to adjust deck height. No need to walk around the mower to adjust four different levers.



HEAVY-DUTY COMPONENTS

Every component is designed for the jobs you need to perform, including the durable cast-aluminum frame, the heavy-duty steel deck, and the bullnose front bumper.

	TURFMASTER® HDX				
	22217†	22225† <i>LIMITED QUANTITY</i>	22237†	22232†	22236†
POWER SYSTEM					
Commercial Engines at 3600 RPM*	Kawasaki® FJ180V KAI	Kohler Command Pro 200 cc	Kohler CV224 Command Pro 224cc	▶ 60V MAX® 3 - 10 Ah Batteries with Rapid Charger Variable Speed RWD Brushless DC Motor Runtime up to 80 min† Charge Time up to 112 min†	Kohler CV224 Command Pro 224cc
Starter	Recoil			Electric	Recoil
Tires	Front: 9" x 2" (22.8 cm x 5.0 cm) Rubber Tire w/ Co-Polymer Wheels Rear: 10.5" x 3" (26.6 cm x 7.6 cm) Rubber Tire w/ Co-Polymer Wheels			Front: 9" x 2.5" (22.8 cm x 6.35 cm) Rubber Tire w/ Co-Polymer Wheels Rear: 10.5" x 3" (26.6 cm x 7.6 cm) Rubber Tire w/ Co-Polymer Wheels	Front: 9" x 2" (22.8 cm x 5.0 cm) Rubber Tire w/ Co-Polymer Wheels Rear: 10.5" x 3" (26.6 cm x 7.6 cm) Rubber Tire w/ Co-Polymer Wheels
Fuel/Capacity	Gas/1 Gal (3.8 L)			Cut over an acre on a single charge†	Gas/1 Gal (3.8 L)
Transmission	Heavy Duty Self-Propelled				Heavy Duty Self-Propelled
Control System	Two Bail Control System				Two Bail Control System
Maximum Forward Speed	4.0 mph (6.4 km/h)			4.2 mph (6.7 km/h)	4.0 mph (6.4 km/h)
MOWING DECK					
Deck Size	30" (76.2 cm)				
Deck Type	Mulch/Rear Bag/Side Discharge				
Deck Construction	13-Gauge Steel Deck / Cast Aluminum Frame				
Spindle Assemblies	Die Cast Spindle, 17 mm Cold Formed Spindle Shafts				
Cutting Height	1.5" – 5.0" in 1/2" increments (3.8 – 12.7 cm in .6 cm increments)				
Blades	(2) .135" (.3 cm) Thick Steel				
Blade Engagement	Blade Brake Clutch (BBC)			-	Blade Brake Clutch (BBC)
Blade Tip Speed	18,000+ ft/min				
WEIGHTS AND MEASUREMENTS					
Weight	173 lbs. (78.4 kg) Dry Mulch Mode	173 lbs. (78.4 kg) Dry Mulch Mode	187 lbs. (84.8 kg) Dry Mulch Mode	197 lbs. (89.4 kg)	195 lbs. (88.4 kg)
Height**	41" (104.1 cm)	41" (104.1 cm)	41" (104.1 cm)	41" (105.6 cm)	41" (105.6 cm)
Width	32" (81.3 cm)	32" (81.3 cm)	32" (81.3 cm)	31" (81 cm)	32" (81.3 cm)
Length**	66" (167.6 cm)	66" (167.6 cm)	66" (167.6 cm)	65" (167.1 cm)	65" (167.1 cm)

†Battery manufacturer rating = 60V maximum & 54V typical usage. Actual voltage varies with load.

* The gross horsepower of these gasoline engines was laboratory rated at 3600 rpm by the engine manufacturer in accordance with SAE J1940 or SAE J1995.

As configured to meet safety, emission and operating requirements, the actual engine horsepower on these mowers will be significantly lower.

** Height-of-Cut in position 3, handle assembled and in the highest position.

†CARB compliant model.


1.1 MAXIMUM ACRES PER HOUR

Maximum acres per hour based on 90% efficiency (MPH x width of cut). Actual productivity dependent upon conditions.



IMPACT PROTECTION

Steel bullnose front bumper, brush guard and engine guard protect components from damage.

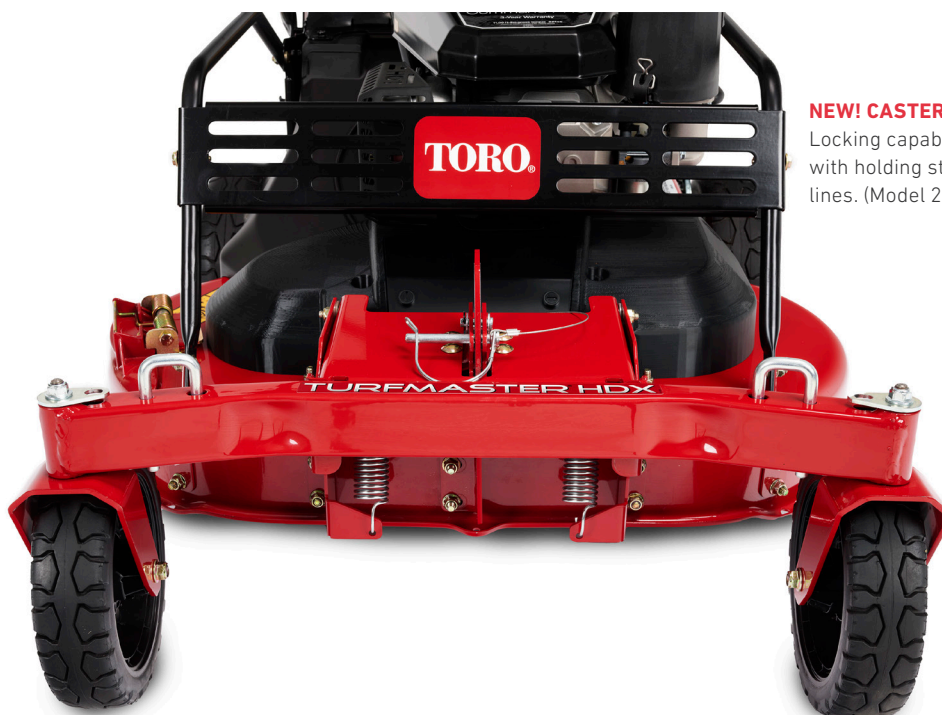

NEW! CASTER WHEELS

Locking capability to aid with holding straight lines. (Model 22236 Only)