

TORO®

PERFORMANCE SERIES

NOZZLES

FOR INFINITY® & FLEX800™ SPRINKLERS




toro.com/golf

INF-FLX34

Performance Series Nozzle Chart

Nozzle Set (31 to 34)	Nozzle Set 31		Nozzle Set 32		Nozzle Set 33		Nozzle Set 34	
Color	 (Yellow)		 (Blue)		 (Brown)		 (Orange)	
Part #	102-0725		102-0726		102-0727		102-7002	
Stator #	102-6929 Blue							
Front								
Color	(Orange)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)
Part #	102-2926	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
Back Nozzle Positions								
Color	(White)	(Red)	(Yellow)	(Orange)	(Yellow)	(Red)	(Yellow)	(Beige)
Part #	102-6940	102-4335	102-6937	102-2926	102-6937	102-2928	102-6937	102-2929
Full Circle Dual Trajectory 34								
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50	54	15.5	58	18.5				
65	55	18.0	60	21.1	65	25.4	70	28.9
80	59	19.9	67	23.6	71	28.5	75	32.4
100	61	22.2	70	26.5	76	32.0	79	36.0

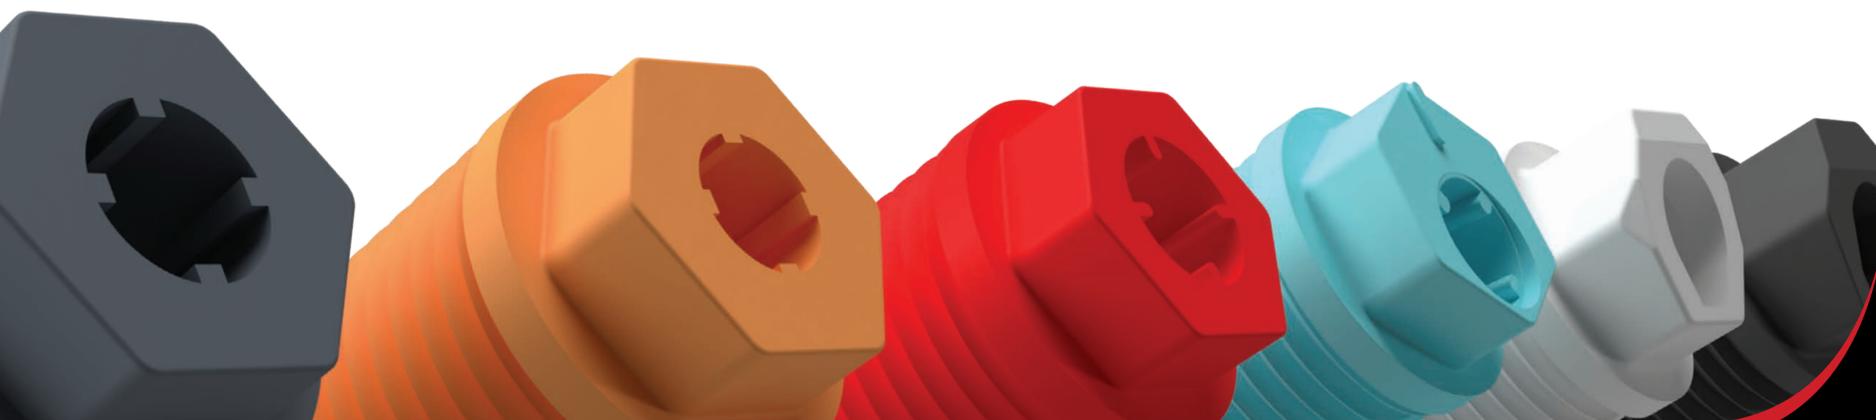


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.




PERFORMANCE SERIES

NOZZLES

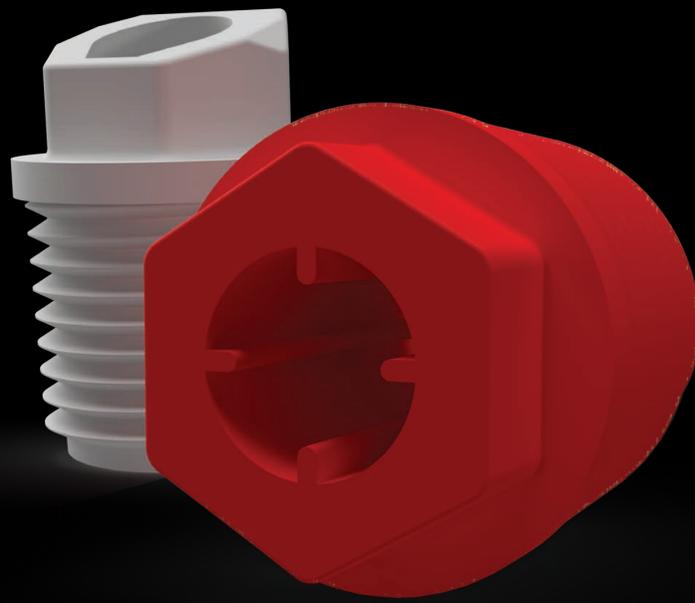


Nozzle Angle Installation Key

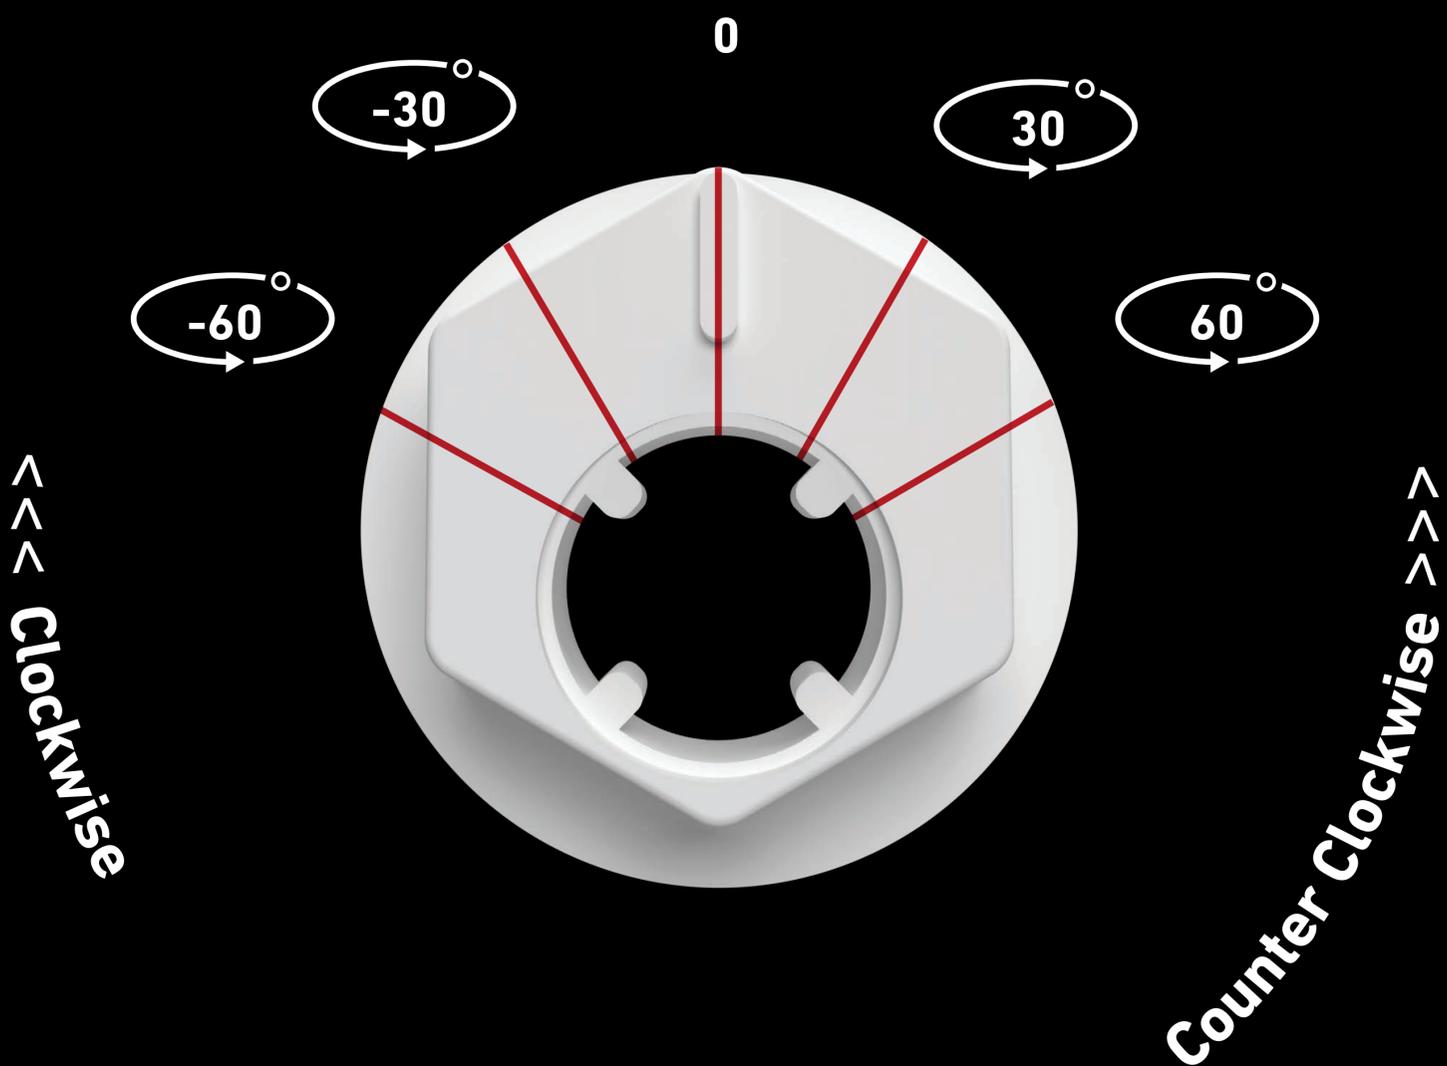

INF-FLX34

Performance Series Nozzle Chart

Nozzle Set (35 to 37)	Nozzle Set 35		Nozzle Set 36		Nozzle Set 37	
Color						
	(Green)		(Gray)		(Black)	
Part #	102-0729		102-0730		102-4261	
Stator #	102-1940 Red, Black (Circles)					
Front						
	(Red)	(Red)	(Brown)	(Red)	(Red)	(Lt. Blue)
Part #	102-4335	102-4335	102-6883	102-4335	102-4335	118-6700
Back Nozzle Positions						
Color	(Yellow)	(Beige)	(White)	(Beige)	(White)	(Beige)
Part #	102-6937	102-2929	102-6940	102-6942	102-6940	102-6942
Full Circle Dual Trajectory 34						
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50						
65	75	37.4				
80	82	41.3	80	46.8	85	52.3
100	86	46.0	87	52.1	89	58.5

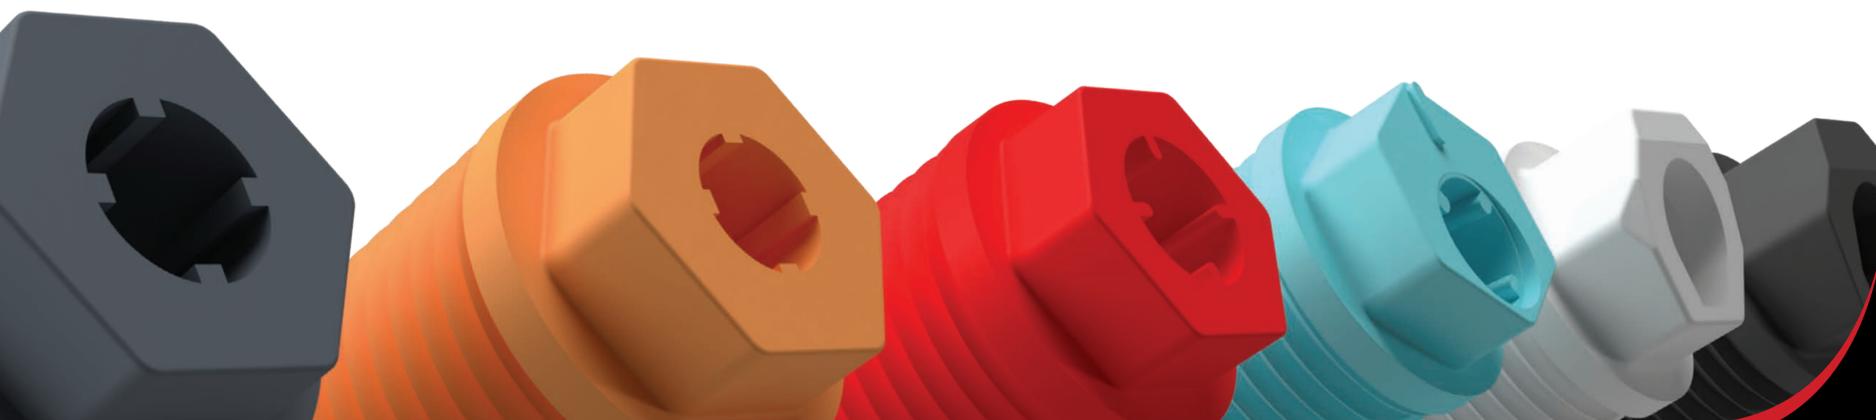


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX35

Performance Series Nozzle Chart

Nozzle Set (30 to 33)	Nozzle Set 30		Nozzle Set 31		Nozzle Set 32		Nozzle Set 33	
Color	 (White)		 (Yellow)		 (Blue)		 (Brown)	
Part #	102-2208		102-0725		102-0726		102-0727	
Stator #	102-6929 Blue		102-1939 White					
Front								
Color	(Yellow)	(Beige)	(Green)	(Blue)	(Green)	(Blue)	(Green)	(Blue)
Part #	102-5670	102-6942	102-6531	102-2925	102-6531	102-6947	102-6531	102-6947
Back Nozzle Positions								
Color	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)
Part #	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
Part Circle Dual Trajectory 35								
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50	43	8.2	52	13.8	57	17.9		
65	45	10.0	55	15.9	60	20.4	65	22.6
80	46	11.5	57	17.6	63	22.7	67	24.9
100	47	13.4	58	19.6	67	25.2	70	27.8

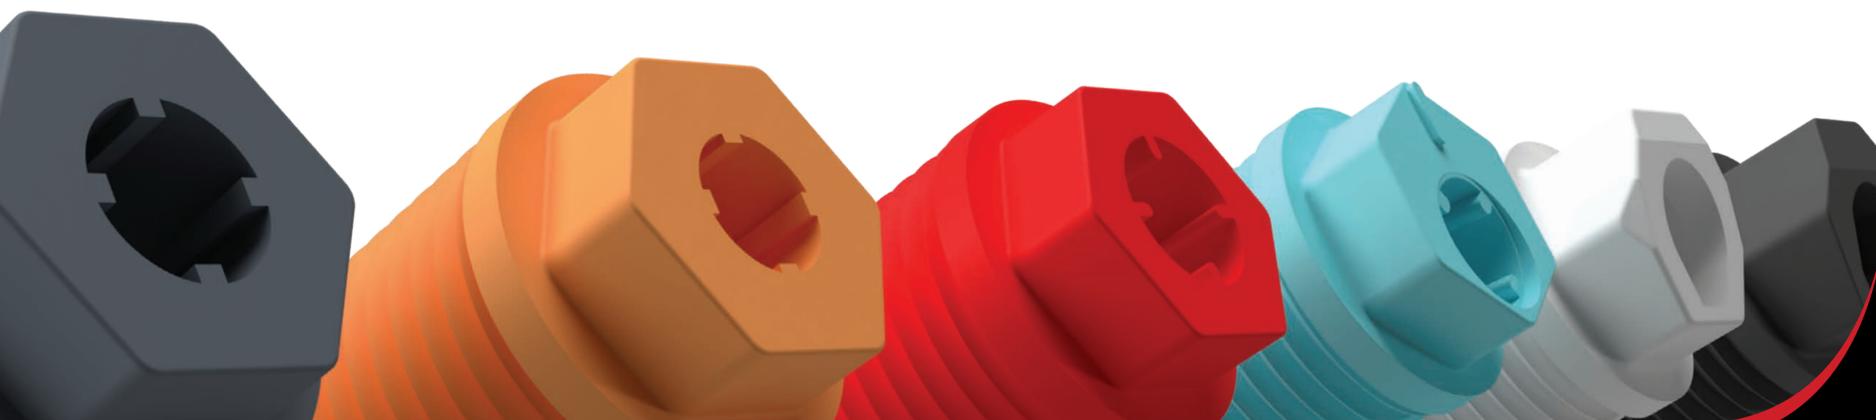


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX35

Performance Series Nozzle Chart

Nozzle Set (34 to 37)	Nozzle Set 34		Nozzle Set 35		Nozzle Set 36		Nozzle Set 37	
Color	 (Orange)		 (Green)		 (Gray)		 (Black)	
Part #	102-7002		102-0729		102-0730		102-4261	
Stator #	102-1939 White		118-7282 Red, Pink					
Front								
Color	(Yellow)	(Purple)	(White)	(Yellow)	(White)	(Yellow)	(White)	(Yellow)
Part #	102-5670	118-6699	102-6940	102-6946	102-6940	102-6946	102-6940	102-6946
Back Nozzle Positions								
Color	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)
Part #	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
Part Circle Dual Trajectory 35								
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50								
65	70	25.6	75	34.2				
80	71	28.5	78	38	80	39.7	85	42.3
100	72	31.7	83	42.5	84	44.5	86	47.3

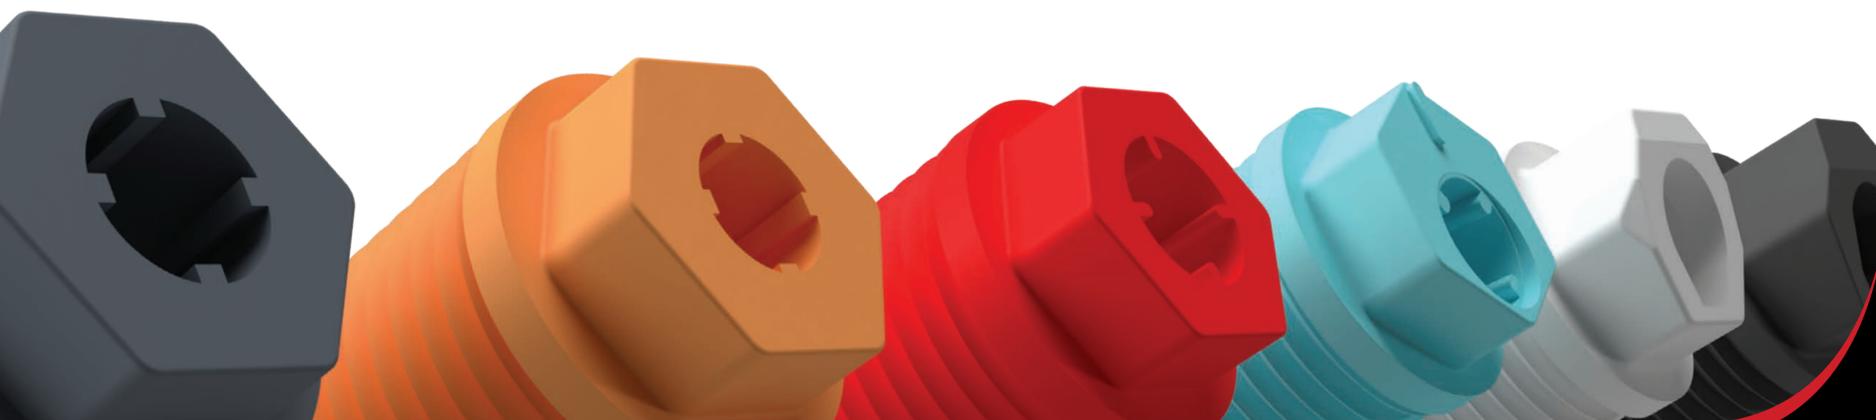


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX54

Performance Series Nozzle Chart

Nozzle Set (51 to 54)	Nozzle Set 51		Nozzle Set 52		Nozzle Set 53		Nozzle Set 54	
Color	 (Yellow)		 (Blue)		 (Brown)		 (Orange)	
Part #	102-0725		102-0726		102-0727		102-7002	
Stator #	102-1939 White							
Front								
Color	(Orange)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)
Part #	102-2926	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
Back Nozzle Positions								
Color	(White)	(Red)	(Yellow)	(Orange)	(Yellow)	(Red)	(Yellow)	(Beige)
Part #	102-6940	102-4335	102-6937	102-2926	102-6937	102-2928	102-6937	102-2929
Full Circle Dual Trajectory 54								
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50	54	15.9	60	18.9	Not recommended at these pressures.			
65	55	18.1	62	21.6	65	25.8	70	29.4
80	58	20.3	68	24.0	70	29.0	75	32.9
100	62	22.7	72	27.0	75	32.5	77	36.5

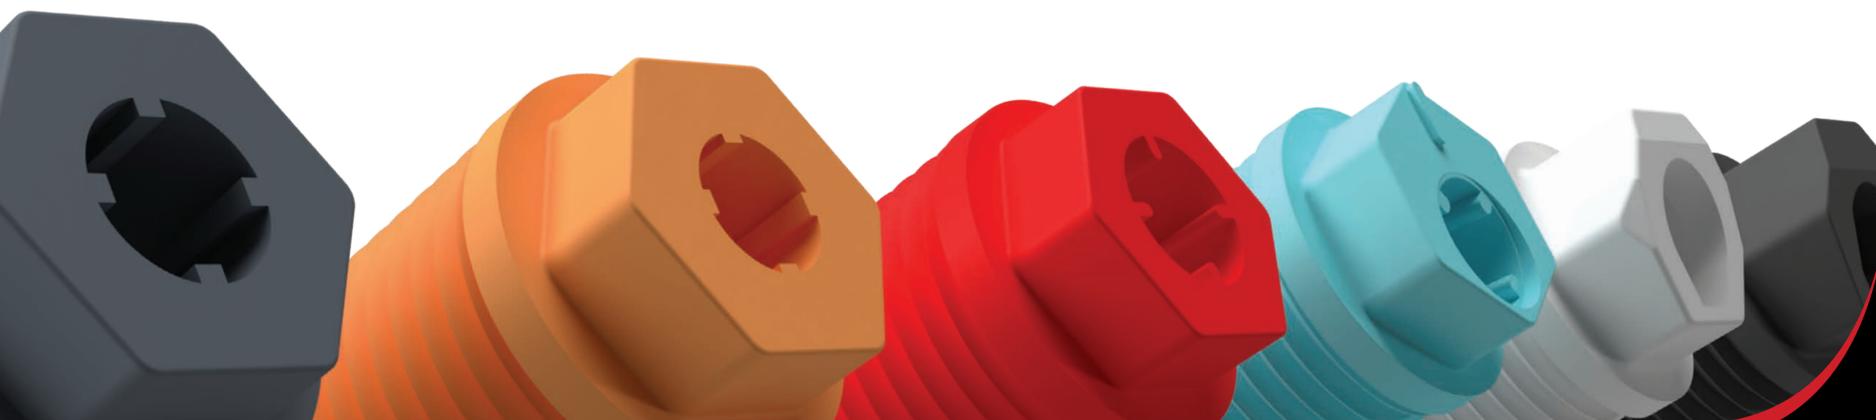


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX54

Performance Series Nozzle Chart

Nozzle Set (55 to 59)	Nozzle Set 55		Nozzle Set 56		Nozzle Set 57		Nozzle Set 58		Nozzle Set 59	
Color										
	(Green)		(Gray)		(Black)		(Red)		(Beige)	
Part #	102-0729		102-0730		102-4261		102-4260		102-4259	
Stator #	102-1940 Red, Black (Circles)									
Front										
	(Brown)	(Red)	(Brown)	(Red)	(Red)	(Lt. Blue)	(White)	(Red)	(Red)	(Red)
Part #	102-6883	102-4335	102-6883	102-4335	102-4335	118-6700	102-6940	102-4335	102-4335	102-6944
Back Nozzle Positions										
Color	(White)	(Beige)	(White)	(Beige)	(White)	(Beige)	(Beige)	(Gray)	(White)	(Red)
Part #	102-6940	102-6942	102-6940	102-6942	102-6940	102-6942	102-6942	102-6945	102-6940	102-4335
Full Circle Dual Trajectory 54										
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50										
65	75	40.8								
80	79	45.6	80	47.3	85	52.9	85	57.9	97	60.7
100	84	50.9	87	53.0	90	59.1	94	65.4	104	67.4

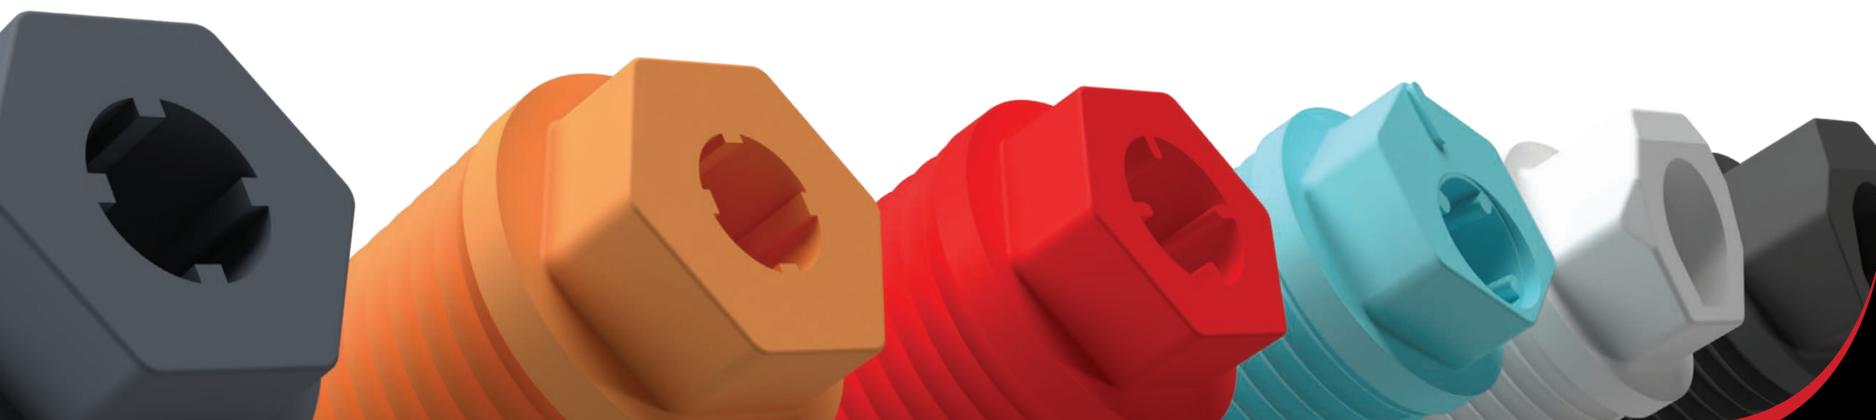


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX55

Performance Series Nozzle Chart






Nozzle Set (51 to 54)	Nozzle Set 51		Nozzle Set 52		Nozzle Set 53		Nozzle Set 54	
Color	 (Yellow)		 (Blue)		 (Brown)		 (Orange)	
Part #	102-0725		102-0726		102-0727		102-7002	
Stator #	102-1939 White							
Front								
Color	(Yellow)	(Brown)	(Green)	(Blue)	(Green)	(Blue)	(Yellow)	(Yellow)
Part #	102-5670	102-5671	102-6531	102-6947	102-6531	102-6947	102-5670	102-6884
Back Nozzle Positions								
Color	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)
Part #	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
Part Circle Dual Trajectory 55								
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50	53	13.9	58	18.1				
65	55	15.3	60	20.7	65	22.9	70	25.9
80	57	17.8	64	23.1	68	25.4	71	29.0
100	59	19.8	68	25.8	72	28.6	73	32.4

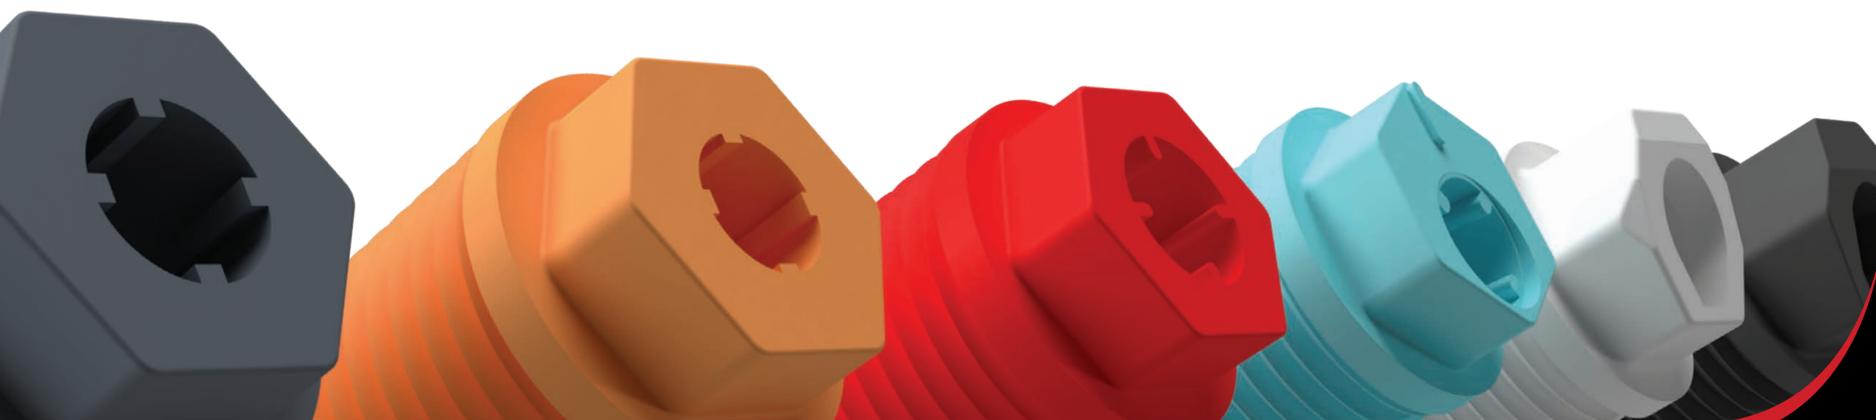


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX55

Performance Series Nozzle Chart




Nozzle Set (55 to 59)	Nozzle Set 55		Nozzle Set 56		Nozzle Set 57		Nozzle Set 58		Nozzle Set 59	
Color	(Green)		(Gray)		(Black)		(Red)		(Beige)	
Part #	102-0729		102-0730		102-4261		102-4260		102-4259	
Stator #	118-7282 Red, Pink								102-1941 Red, Black (Spokes)	
Front	 (White)	 (Yellow)	 (White)	 (Yellow)	 (White)	 (Yellow)	 (White)	 (Yellow)	 (White)	 (Yellow)
Part #	102-6940	102-6946	102-6940	102-6946	102-6940	102-6946	102-6940	102-6946	102-6940	102-6946
Back Nozzle Positions	 (Red)	 (Red)	 (Red)	 (Red)	 (Red)	 (Red)	 (Red)	 (Red)	 (Red)	 (Red)
Color	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)	(Red)
Part #	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
Part Circle Dual Trajectory 55										
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50										
65	75	34.6								
80	79	38.5	80	40.0	83	42.9	85	49.0	89	58.1
100	83	43.0	85	45.1	87	48.1	88	54.8	95	64.6

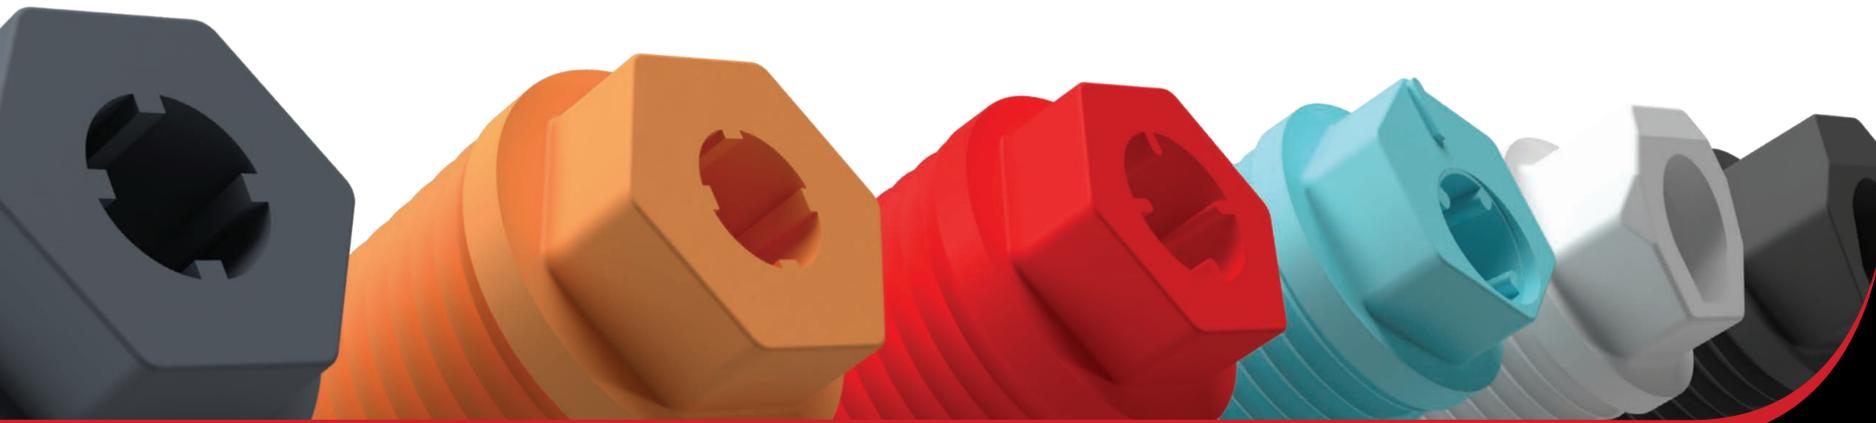

■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX55

Performance Series Nozzle Chart

Nozzle Set (55 to 59)	Nozzle Set 55		Nozzle Set 56		Nozzle Set 57		Nozzle Set 58		Nozzle Set 59	
Color	(Green)		(Gray)		(Black)		(Red)		(Beige)	
Part #	102-0729		102-0730		102-4261		102-4260		102-4259	
Stator #	118-7282 Red, Pink								102-1941 Red, Black (Spokes)	
Front	 (White)	 (Yellow)	 (White)	 (Yellow)	 (White)	 (Yellow)	 (White)	 (Yellow)	 (White)	 (Yellow)
Part #	102-6940	102-6946	102-6940	102-6946	102-6940	102-6946	102-6940	102-6946	102-6940	102-6946
Back Nozzle Positions										
Color	(Red)									
Part #	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
Part Circle Dual Trajectory 55										
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50										
65	75	34.6								
80	79	38.5	80	40.0	83	42.9	85	49.0	89	58.1
100	83	43.0	85	45.1	87	48.1	88	54.8	95	64.6




■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX35-6

Performance Series Nozzle Chart


Nozzle Set (30 to 33)	Nozzle Set 30		Nozzle Set 31		Nozzle Set 32		Nozzle Set 33	
Color	 (White)		 (Yellow)		 (Blue)		 (Brown)	
Part #	102-2208		102-0725		102-0726		102-0727	
Stator #	102-6929 Blue			102-1939 White				
Front								
Color	(Blue)	(Gray)	(Black)	(Green)	(Black)	(Dark Red)	(Black)	(Dark Red)
Part #	102-2925	102-2910	102-6941	118-6697	102-6941	118-6698	102-6941	118-6698
Back Nozzle Positions								
Color	(Red)		(Red)		(Red)		(Red)	
Part #	102-4335		102-4335		102-4335		102-4335	
Part Circle TruJectory 35-6								
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50	42	7.6	53	13.9	58	19.4		
65	45	8.3	55	15.9	60	22.3	65	24.3
80	46	9.2	59	17.6	64	24.5	69	26.8
100	48	10.1	61	19.5	68	27.3	73	30.0

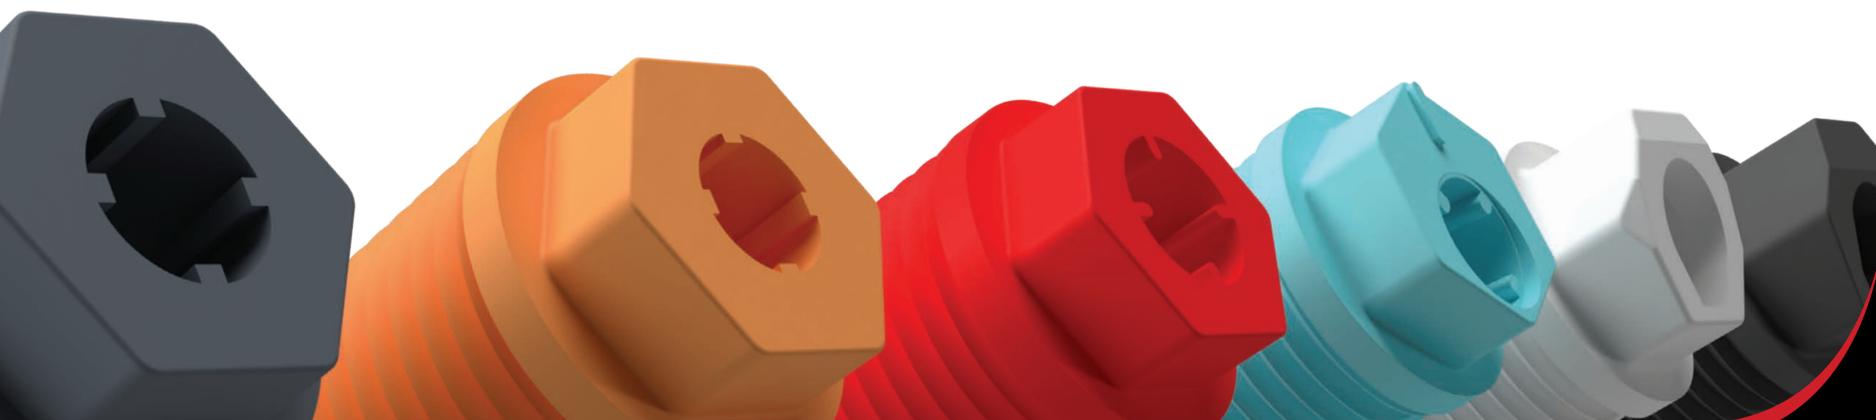


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX35-6

Performance Series Nozzle Chart

Nozzle Set (34 to 37)	Nozzle Set 34		Nozzle Set 35		Nozzle Set 36		Nozzle Set 37	
Color	 (Orange)		 (Green)		 (Gray)		 (Black)	
Part #	102-7002		102-0729		102-0730		102-4261	
Stator #	102-1939 White		118-7282 Red, Pink					
Front	 30°	 -30°		 -30°		 -30°	 30°	 -30°
Color	(Black)	(Dark Red)	(White)	(Purple)	(White)	(Lt. Blue)	(White)	(Lt. Blue)
Part #	102-6941	118-6698	102-6940	118-6699	102-6940	118-6700	102-6940	118-6700
Back Nozzle Positions								
Color	(Red)		(Red)		(Red)		(Red)	
Part #	102-4335		102-4335		102-4335		102-4335	
Part Circle TruJectory 35-6								
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50								
65	70	26.2	75	34.6				
80	73	28.6	79	38.6	80	41.5	85	43.8
100	76	32.0	84	43.1	85	46.5	90	49.3

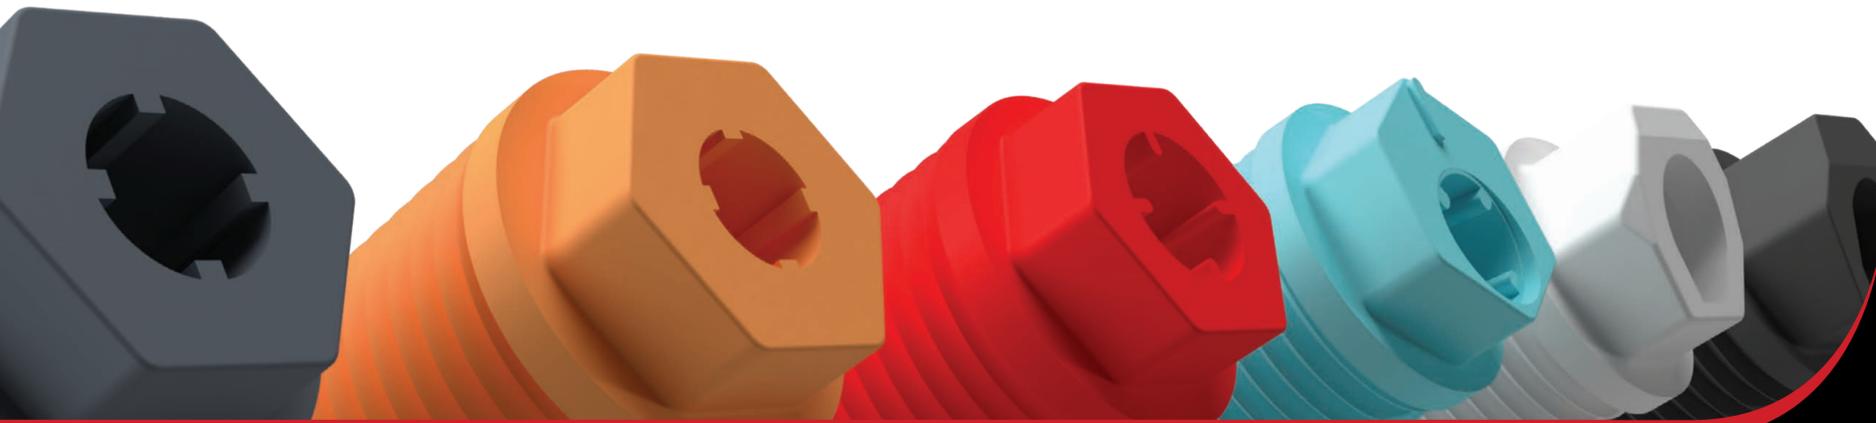


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX55-6

Performance Series Nozzle Chart

Nozzle Set (51 to 54)	Nozzle Set 51		Nozzle Set 52		Nozzle Set 53		Nozzle Set 54	
Color	 (Yellow)		 (Blue)		 (Brown)		 (Orange)	
Part #	102-0725		102-0726		102-0727		102-7002	
Stator #	102-1939 White							
Front								
Color	(Black)	(Green)	(Black)	(Dark Red)	(Black)	(Dark Red)	(Black)	(Purple)
Part #	102-6941	118-6697	102-6941	118-6698	102-6941	118-6698	102-6941	118-6699
Back Nozzle Positions								
Color	(Red)		(Red)		(Red)		(Red)	
Part #	102-4335		102-4335		102-4335		102-4335	
Part Circle TruJectory 55-6								
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50	53	14.5	58	19.9				
65	55	16.5	60	22.9	65	25.4	70	26.9
80	59	18.2	65	25	70	27.6	73	30.4
100	61	20.3	70	28	74	30.7	76	33.9

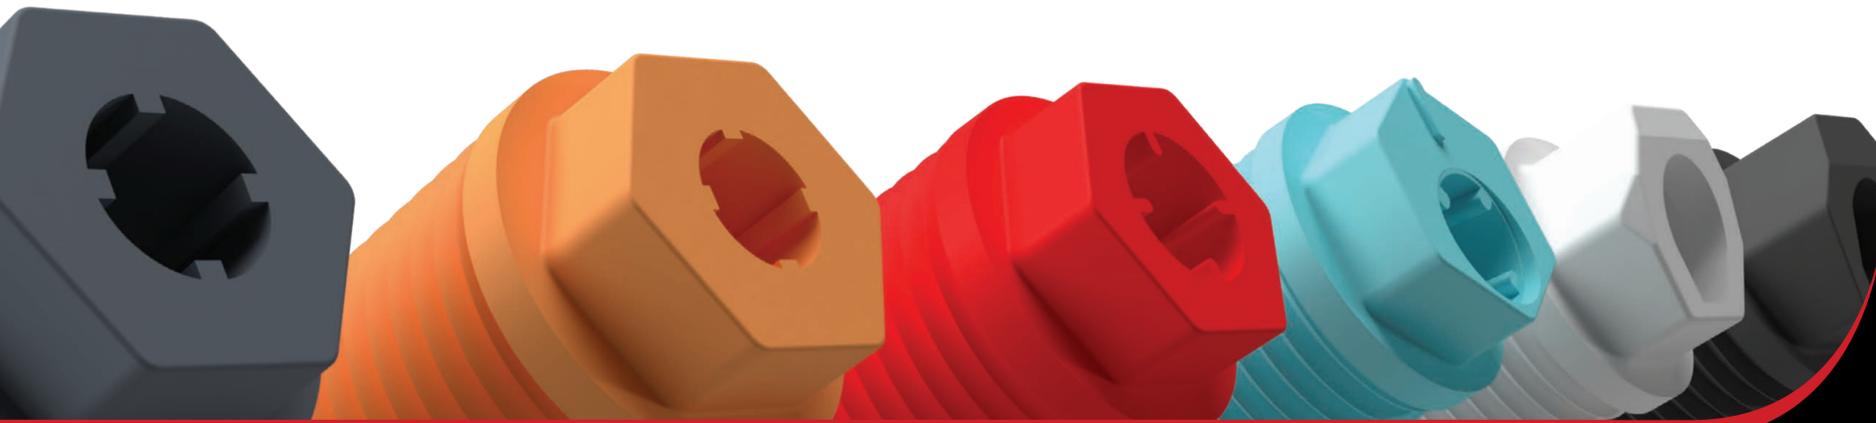


■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

INF-FLX55-6

Performance Series Nozzle Chart

Nozzle Set (55 to 59)	Nozzle Set 55		Nozzle Set 56		Nozzle Set 57		Nozzle Set 58		Nozzle Set 59	
Color	 (Green)		 (Gray)		 (Black)		 (Red)		 (Beige)	
Part #	102-0729		102-0730		102-4261		102-4260		102-4259	
Stator #	102-1940 Red, Black (Circles)								102-1941 Red, Black (Spokes)	
Front	 (White)	 (Purple)	 (White)	 (Purple)	 (White)	 (Purple)	 (Black)	 (Lt. Blue)	 (Black)	 (Red)
Part #	102-6940	118-6699	102-6940	118-6699	102-6940	118-6699	102-6941	118-6700	102-6941	102-6944
Back Nozzle Positions	 (Red)		 (Red)		 (Red)		 (Red)		 (Red)	
Color	(Red)		(Red)		(Red)		(Red)		(Red)	
Part #	102-4335		102-4335		102-4335		102-4335		102-4335	
Part Circle TruJectory 55-6										
Pressure (PSI)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)	Radius (FT)	Flow (GPM)
50										
65	75	35.1								
80	80	39.3	80	40.7	85	43.2	88	51.0	95	60.1
100	85	43.9	88	46.1	90	49.8	90	56.3	100	66.3

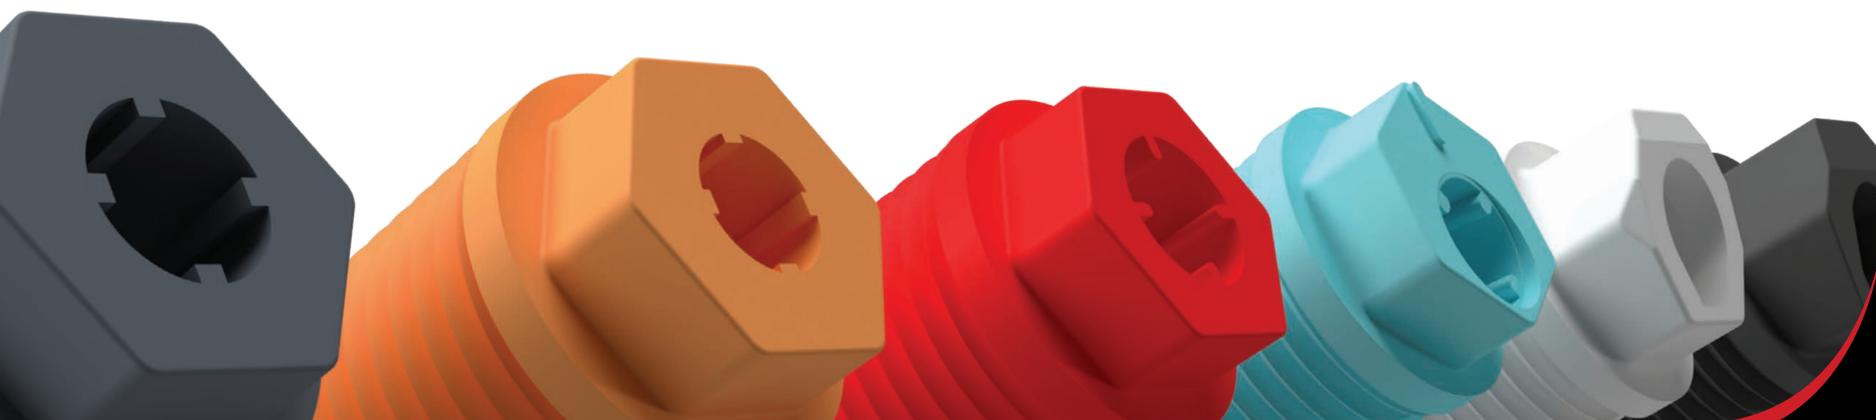

■ Not recommended at these pressures. Radius shown in feet. Toro® recommends the use of a 1 1/4" swing joint at flows over 25-gpm (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1. Actual site conditions must be considered when selecting the appropriate nozzle. All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 psi.

DISTRIBUTOR **PARTNERS.**

American Golf Partners (a-z)

1.) Century Equipment, Inc.

(419) 865-7400

2.) E. H. Griffith, Inc.

(412) 271-3365

3.) Grassland Equipment & Irrigation Corp.

(518) 785-5841

4.) Ness Turf Equipment

(808) 486-8300

5.) Hector Turf

(954) 429-3200

6.) Jerry Pate Turf & Irrigation, Inc.

(850) 479-4653

7.) Kenney Machinery Corp.

(317) 872-4793

8.) L. L. Johnson Distributing Company

(303) 320-1270

9.) Midland Implement Company, Inc.

(406) 248-7771

10.) Midwest Turf & Irrigation, Inc.

(402) 895-8900

11.) MTI Distributing, Inc.

(763) 592-5600

12.) Professional Turf Products

(817) 785-1900

13.) Reinders, Inc.

(262) 786-3300

14.) Simpson Norton Corporation

(623) 932-5116

15.) Smith Turf & Irrigation L.L.C.

(704) 393-8873

16.) Spartan Distributors, Inc.

(616) 887-7301

17.) Storr Tractor Company

(908) 722-9830

18.) Turf Equipment & Irrigation

(801) 566-3256

19.) Turf Equipment & Supply Company, Inc.

(410) 799-5575

20.) Turf Products L.L.C.

(860) 763-3581

21.) Turf Star Western

(800) 585-8001

22.) Wesco Turf Inc.

(941) 377-6777


Canadian Golf Partners (a-z)

24.) Oakcreek Golf and Turf Inc.

(403) 279-2907

25.) Turf Care Products Canada

(905) 836-0988

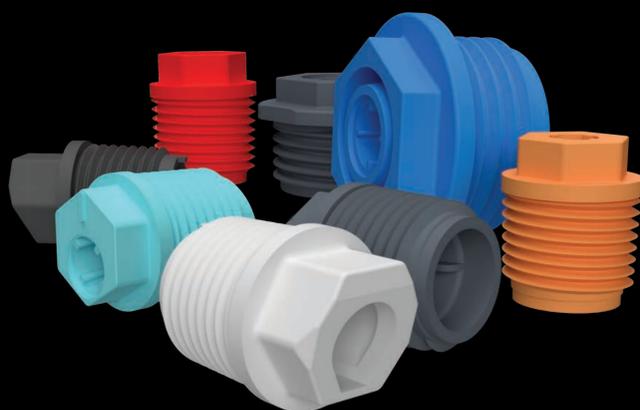



Always solving. Always evolving.

#1 in Golf Irrigation & Equipment*



facebook.com/Toro.Company
instagram.com/thetorocompany
youtube.com/toro

www.toro.com

**5825 Jasmine Street
Riverside, CA 92504-1183
Phone: 877-345-8676
Fax: 800-862-8676**

We reserve the right to improve our products and make changes in the specifications and designs without notice and without incurring obligation.

Products depicted in this brochure are for demonstration purposes only.

Actual products offered for sale may vary in design and features.

**©2026 The Toro Company
All Rights Reserved**

*Based on market share data from National Golf Foundation Turf Brand Health Survey 2022.

This statement has not been evaluated or endorsed by any regulatory agency.

P/N: 26-5181-IG-NA