



RotaQuake™ 630


ROTARY AERATOR

FEATURES

- Tremendous Underground Benefit with Minimal Surface Disruption – *Creates cracks, fissures and space for air, water, nutrients and root growth*
- Easily Adjustable Depth Control – *pins in the rear and crank up front, aerates up to 10" (25.4 cm) deep*
- Durable Design – *robust gear box, spindle, and blade mount*
- Cam Style Clutch – *minimizes down time by allowing clutch to slip rather than shearing a bolt when striking an object underground*

Quick Relief for Highly Compacted Turf.

The Bullseye RotaQuake 630 is an aerator that decompacts the soil using a set of rotating steel blades. As these blades cut cleanly through the soil, they create a wave action that shatters compacted areas and opens up the subsoil. The RotaQuake can work at depths up to 10" (25.4 cm) with minimal to no surface disruption to keep your turf ready for play. The rear roller smooths surface behind rotating blades and the integrated legs make unhooking and storage easy.

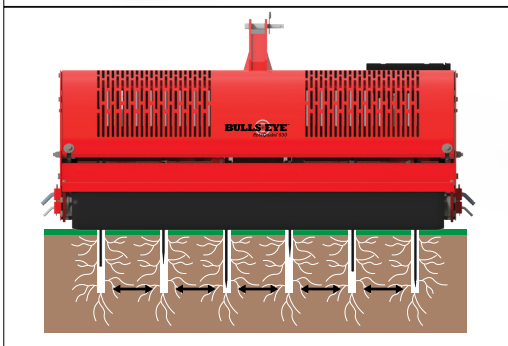

Tapered blade design causes soil to shift from side to side as blades rotate through it





RotaQuake™ 630*

The Bullseye RotaQuake 630 is an aerator that decompacts the soil using a set of rotating steel blades. As these blades cut cleanly through the soil, they create a wave action that shatters compacted areas and opens up the subsoil. The RotaQuake can work at depths up to 10" (25.4 cm) with minimal to no surface disruption to keep your turf ready for play. The rear roller smooths surface behind rotating blades and the integrated legs make unhooking and storage easy.



| BULLSEYE ROTAQUAKE 630, MODEL 46454 | |
|-------------------------------------|---|
| WORKING WIDTH | 63" (160 cm) |
| WORKING DEPTH | Adjustable depth, up to 10" (25.4 cm) |
| OPERATION SPEED | 0.3 - 1.0 mph (.048 - 1.6 km/h) |
| TRACTOR REQUIRED | 35 hp (26 kW), lift capacity 1,654 lbs. (750 kg) |
| PTO SPEED | 540 rpm |
| 3-POINT CONNECTION | Category 1 and 2 |
| CAPACITY | Up to 27,720 square feet per hour (2,560 square meters per hour) |
| NUMBER OF BLADES | 18 |
| BLADE THICKNESS | 0.5" (12.7 mm), tapered |
| BLADE SPACING | 10" (25.4 cm) |
| WEIGHT | 1,355 lbs (615 kg) |
| DIMENSIONS | Width 71" (180.3 cm) Height 42" (106.6 cm) Length 59" (149.8 cm) |
| WARRANTY | One-year limited warranty. Refer to the Operator's Manual for further details. |

| ACCESSORIES | |
|---------------------|----------------------------------|
| EXTRA BLADES | Set of 18 blades, part #144-7700 |

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in design, required attachments and safety features. Consult your local Toro Distributor.

