




# GreensPro® 1260

GREENS ROLLER

## FEATURES

- *Overlapping smoothing rollers deliver unmatched consistency while eliminating crease marks*
- *Fully adjustable operator platform for comfort and safety*
- *Independent, articulating smoothing heads follow undulations, preserving natural contours*
- *Light tongue weight makes maneuvering simple*
- *Innovative wheel caddy system for effortless transport to roll conversions*
- *Hydraulic motor drive for ease of operation and reduced maintenance*

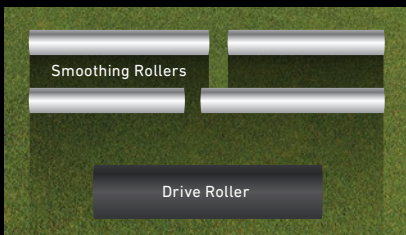

*Offset smoothing roller design for uniform greens appearance and playability*

## Delivering fast, smooth greens. Easily.

The GreensPro 1260 is in a league of its own, delivering exceptionally smooth and fast greens with a superior operator platform. The split, overlapping, contour-following smoothing rollers follow undulations delivering exceptionally smooth putting surfaces.

The operator platform is fully adjustable for unmatched comfort and operator safety.

The transport system featuring a QuickLatch coupler makes transporting from green to green unbelievably quick and simple. Direct hydraulic motor drive for ease of operation and reduced maintenance. Exceptional greens rolling and ultimate useability. That's the GreensPro 1260.

[toro.com](https://www.toro.com)





# GreensPro® 1260

The Toro GreensPro 1260 riding greens roller is the perfect rolling tool for fine sporting turf such as golf greens, bowling greens and tennis courts. Turf that requires a smooth, high performance surface for optimum playing will benefit from precision greens rolling with the GreensPro 1260.



GREENSPRO 1260, MODEL 44913*	
<b>ENGINE</b>	Honda® GX200 5.5 hp (4.1 kW) @3600 RPM, air-cooled, 4-stroke OHV; mechanically governed.
<b>FUEL</b>	Unleaded gas
<b>TRANSMISSION</b>	Hydrogear PG Pump
<b>DRIVE</b>	Parker hydraulic motor to drive roller
<b>SMOOTHING ROLLS</b>	3.44" (87.5 mm) diameter - 4 split rollers. Overlapping twin steering heads.
<b>TRACTION DRIVE ROLLER</b>	7.24" (183.9 mm) diameter vulcanized rubber coated cylinder, 31.5" (80 cm) long
<b>ROLLING WIDTH</b>	47.2" (120 cm)
<b>GROUND SPEED</b>	Roll: 0-8 mph (0-12.8 km/h) in either direction
<b>CONTROLS</b>	Tilt steering wheel, directional foot pedals, parking brake, engine stop switch, recoil, choke, fuel shut off, light switch, and hourmeter
<b>CONTOUR FOLLOW</b>	Yes
<b>GROUND PRESSURE</b>	3.75 PSI (0.26 Bar)
<b>STEERING</b>	Wheel, adjustable tilt to 40°
<b>SEAT</b>	High-back, adjustable with standard armrests
<b>TRAILER</b>	Integrated with QuickLatch towing system
<b>LIFTING TIRES</b>	16 x 6.50 - 8
<b>LIFTING TIRE PRESSURE</b>	15 PSI (1.03 Bar)
	<b>OVERALL DIMENSIONS (STORAGE)</b>
<b>WIDTH</b>	48" (122 cm)
<b>LENGTH</b>	63" (160 cm)
<b>HEIGHT</b>	68" (173 cm)
<b>WEIGHT</b>	679 lbs. (309 kg)
	<b>OVERALL DIMENSIONS (TOWING)</b>
<b>WIDTH</b>	48" (122 cm)
<b>LENGTH</b>	93" (236 cm)
<b>HEIGHT</b>	47" (119 cm)
<b>WARRANTY</b>	Two-year limited warranty. Refer to operator's manual for further details.

\*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.

