

ULTRA BUGGY® 2500-T



2,500 lbs. carrying capacity

Easy access to common service areas

Reinforced tracks for maximum durability

The tracked Ultra Buggy represents the ultimate in productivity, jobsite efficiency and ROI.

- Easy access to common service areas.
- The traction controls are easy to learn, effortless to operate, smooth and responsive.
- Large fuel tank capacity allows for all day productivity.





ULTRA BUGGY 2500







The wheeled Ultra Buggy offers versatility and flexibility to any task. It's compact size and maneuverability allows you to dump material in tough to reach areas. With additional features such as:

- Suspended, ride-on platform results in less operator fatigue, folds up for ease of trailering.
- Fully hydraulic dump system makes unloading smooth and effortless.
- Patented oversized brake pedal is easy to locate and use for comfortable operation.

ULTRA BUGGY® 2500-TS



180 degree continuous dump radius



Fold up platform for easy transport



Built on the trusted tracked Ultra Buggy frame, the swivel buggy gives you a 180 degree dump radius, plus:

- Dump and swivel switches mounted and linked to the traction controls give users easy access.
- The same 2,500 lbs. carrying capacity that customers have come to expect.


ULTRA BUGGY e2500




Toro's electric Ultra Buggy is the next evolution in material handling. Electric power eliminates engine exhaust emissions, and the thick, polyethylene tub handles all types of material.

- Toro designed HyperCell® Lithium-Ion battery system is optimized to deliver up to 8-hour continuous runtime.
- The 31.5" width of this machine allows easy access through 3-ft doors.
- Designed and tested to achieve a 2,500 lbs. carrying capacity with a single wheel configuration.







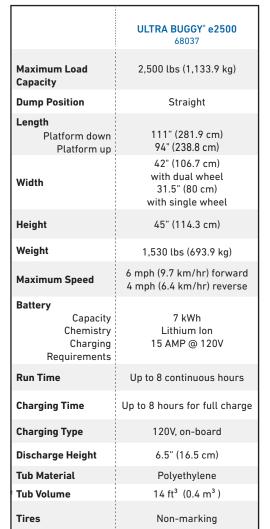





	ULTRA BUGGY 2500T & ULTRA BUGGY 2500TS 68141 & 68138	ULTRA BUGGY 2500 68038
Maximum Load Capacity	2,500 lbs (1,133.9 kg)	2,500 lbs (1,133.9 kg) with dual wheel 1,875 lbs (850.4 kg) with single wheel
Dump Position	Straight/Swivel	Straight
Length Platfrom down Platform up	109.5" (278.1 cm) 95.5" (242.6 cm)	111" (281.9 cm) 94" (238.8)
Width	35.5" (90.2 cm)	42" (106.7 cm) with dual wheel 33.75" (85.7 cm) with single wheel
Height	47.7" (121.2 cm)	45" (114.3 cm)
Weight	1,886 lbs (855.5 kg)	1,370 lbs (621.4 kg)
Maximum Speed	6 mph (9.7 km/hr) forward 3 mph (4.8 km/hr) reverse	7 mph (11.3 km/hr) forward & reverse
Engine	25 HP Kohler® Confidant	11.7 HP (8.6 kW) Honda® GX390
Fuel Tank	10 Gallons (37.8 L)	5.7 Gallons (21.6 L)
Discharge Height	12.75" (32.4 cm) straight 21" (53.3 cm) swivel	6.5" (16.5 cm)
Tub Material	Polyethelyne	Polyethelyne
Tub Volume	16 ft³ (0.45 m³)	16 ft³ (0.45 m³)
Tracks/Tires	Rugged armid corde	Quick-Disconnect Foam-Filled

STEEL TUB ACCESSORY designed for all Ultra Buggy models

The steel tub is sold as an optional accessory to replace the standard poly tub.

- The steel tub offers a 14 -cubic foot and 2,500-pound carrying capacity.
- The curved back allows the tub to dump material at any point along the 180-degree radius when used on the Ultra Buggy 2500-TS model.









facebook.com/toro.company

twitter.com/TheToroCompany



instagram.com/thetorocompany



youtube.com/toro

toro.com / toro.ca

490-0910 ©2023 The Toro Company, Bloomington, MN 55420 All rights reserved. Printed in the USA.