




# SWEET SPOT™ DRIP TAPE



AVAILABLE IN **AQUA-TRAXX® AZUL™**

**5/8" ID      6/8" ID      7/8" ID**  
**"SWEET SPOT"**

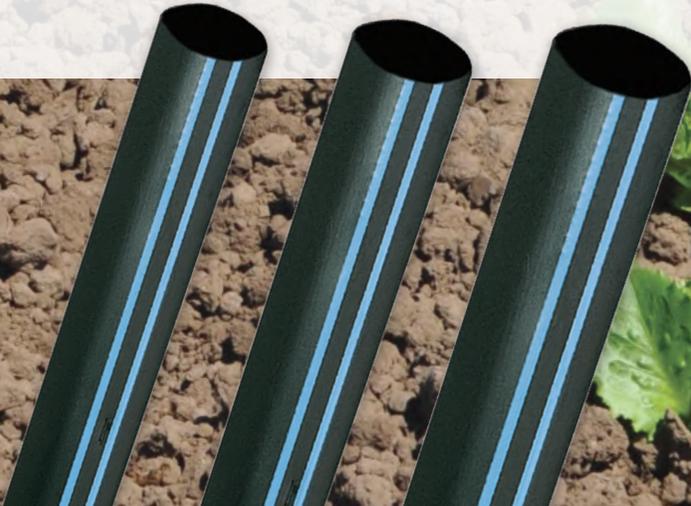

# SWEET SPOT™



AVAILABLE IN **AQUA-TRAXX® AZUL™**

## LONGER RUNS, LESS COST

With Toro's new 6/8" ID Aqua-Traxx® drip tape, Sweet Spot™, growers get the perfect tape to split the difference between 5/8" ID tape and 7/8" ID tape – enabling growers to achieve longer runs than 5/8" tape and lower costs than 7/8" tape. Not only is Toro the only manufacturer of 6/8" drip tape, but Toro is also the only provider of 6/8" fittings to support these unique, cost-saving applications.



## BENEFITS OF SWEET SPOT DRIP TAPE:

### LONGER RUNS COMPARED TO 5/8":

- Better uniformity
- Less system cost from less layflat, connections and labor

### LESS EXPENSIVE THAN 7/8":

- Less pounds of plastic per acre
- More environmentally friendly
- More water savings due to less runoff

**6/8" FITTINGS ONLY AVAILABLE FROM TORO**



# SWEET SPOT™ PRODUCT SPECIFICATIONS

AQUA-TRAXX® AZUL™ FLOW RATES													
Emitter Flow Part Number	Outlet Spacing		Emitter Flow Rate						Q-100		Emitter Exponent	Filtration Requirement	
			gph		lph		gpm/100 ft		lph/1 meter				
			in	cm	@ 8 psi	@ 10 psi	@ 0.55 bar	@ 0.7 bar	@ 8 psi	@ 10 psi			@ 0.55 bar
<b>0.07 gph emitter</b>													
EAXxx0817	8	20	0.07	0.08	0.26	0.30	0.17	0.20	1.30	1.47	0.55	140 (105)	
EAXxx1609	16	40	0.07	0.08	0.26	0.30	0.09	0.10	0.65	0.74			
<b>0.09 gph emitter</b>													
EAXxx0822	8	20	0.09	0.10	0.34	0.38	0.22	0.25	1.66	1.88	0.53	120 (125)	
EAXxx1611	16	40	0.09	0.10	0.34	0.38	0.11	0.13	0.83	0.94			
<b>0.10 gph emitter</b>													
EAXxx0825	8	20	0.10	0.11	0.38	0.43	0.25	0.28	1.86	2.11	0.50	120 (125)	
EAXxx1613	16	40	0.10	0.11	0.38	0.43	0.13	0.14	0.93	1.05			
<b>0.13 gph emitter</b>													
EAXxx0467	4	10	0.13	0.15	0.51	0.57	0.67	0.75	4.99	5.58	0.50	120 (125) <sup>1</sup>	
EAXxx0644	6	15	0.13	0.15	0.51	0.57	0.44	0.50	3.33	3.72		100 (149) <sup>2</sup>	
EAXxx0834	8	20	0.13	0.15	0.51	0.57	0.34	0.37	2.50	2.79			
EAXxx1222	12	30	0.13	0.15	0.51	0.57	0.22	0.25	1.66	1.86			
EAXxx1617	16	40	0.13	0.15	0.51	0.57	0.17	0.19	1.25	1.40			
EAXxx1814	18	45	0.13	0.15	0.51	0.57	0.14	0.17	1.11	1.24			
EAXxx2411	24	60	0.13	0.15	0.51	0.57	0.11	0.12	0.83	0.93			
<b>0.15 gph emitter</b>													
EAXxx0650	6	15	0.15	0.17	0.57	0.63	0.50	0.56	3.73	4.17	0.50	100 (149) <sup>2</sup>	
EAXxx1225	12	30	0.15	0.17	0.57	0.63	0.25	0.28	1.86	2.08			
EAXxx1817	18	45	0.15	0.17	0.57	0.63	0.17	0.19	1.24	1.39			
<b>0.20 gph emitter</b>													
EAXxx04100	4	10	0.20	0.22	0.76	0.85	1.00	1.12	7.47	8.36	0.50	100 (149) <sup>2</sup>	
EAXxx0667	6	15	0.20	0.22	0.76	0.85	0.67	0.75	4.99	5.58			
EAXxx0850	8	20	0.20	0.22	0.76	0.85	0.50	0.56	3.74	4.18			
EAXxx1234	12	30	0.20	0.22	0.76	0.85	0.34	0.37	2.50	2.79			
EAXxx1625	16	40	0.20	0.22	0.76	0.85	0.25	0.28	1.87	2.09			
EAXxx1822	18	45	0.20	0.22	0.76	0.85	0.22	0.25	1.67	1.86			
EAXxx2417	24	60	0.20	0.22	0.76	0.85	0.17	0.19	1.25	1.40			
<b>0.27 gph emitter</b>													
EAXxx04134	4	10	0.27	0.30	1.01	1.13	1.34	1.50	9.99	11.16	0.50	100 (149) <sup>2</sup>	
EAXxx0690	6	15	0.27	0.30	1.01	1.13	0.90	1.00	6.66	7.44			
EAXxx0867	8	20	0.27	0.30	1.01	1.13	0.67	0.75	4.99	5.58			
EAXxx1245	12	30	0.27	0.30	1.01	1.13	0.45	0.50	3.33	3.72			
EAXxx1634	16	40	0.27	0.30	1.01	1.13	0.34	0.37	2.50	2.79			
EAXxx1830	18	45	0.27	0.30	1.01	1.13	0.30	0.33	2.22	2.48			
EAXxx2422	24	60	0.27	0.30	1.01	1.13	0.22	0.25	1.67	1.86			
<b>0.34 gph emitter</b>													
EAXxx04168	4	10	0.34	0.37	1.27	1.42	1.68	1.87	12.48	13.95	0.50	120 (125)	
EAXxx06112	6	15	0.34	0.37	1.27	1.42	1.12	1.25	8.33	9.31			
EAXxx0884	8	20	0.34	0.37	1.27	1.42	0.84	0.94	6.24	6.98			
EAXxx1256	12	30	0.34	0.37	1.27	1.42	0.56	0.62	4.16	4.65			
EAXxx1642	16	40	0.34	0.37	1.27	1.42	0.42	0.47	3.12	3.49			
EAXxx1838	18	45	0.34	0.37	1.27	1.42	0.38	0.42	2.78	3.10			
EAXxx2428	24	60	0.34	0.37	1.27	1.42	0.28	0.31	2.08	2.33			
<b>0.53 gph emitter</b>													
EAXxx04265	4	10	0.53	0.59	2.01	2.24	2.65	2.96	19.75	22.08	0.50	120 (125)	
EAXxx08133	8	20	0.53	0.59	2.01	2.24	1.33	1.48	9.87	11.04			
EAXxx1288	12	30	0.53	0.59	2.01	2.24	0.88	0.99	6.58	7.36			
EAXxx1666	16	40	0.53	0.59	2.01	2.24	0.66	0.74	4.94	5.52			
EAXxx2444	24	60	0.53	0.59	2.01	2.24	0.44	0.49	3.29	3.68			
EAXxx3629	36	90	0.53	0.59	2.01	2.24	0.29	0.33	2.19	2.45			

**KEY**  
 PART NUMBER: EA 5 05 04 67 - 1300  
 EA = Aqua-Traxx  
 5 = Diameter (inch)  
 05 = Mil Thickness  
 04 = Emitter Spacing (inch)  
 67 = Flow Rate (gph/100)  
 1300 = Reel Length (feet/10)

\*X denotes the diameter. 5 for 5/8", 6 for 6/8", 7 for 7/8", 8 for 1", 9 for 1-1/8" and 11 for 1-3/8"  
 \*\*xx denotes mil thickness.  
 \*\*\*\*" only available in 13 mil  
<sup>1</sup> 120 mesh: 5 - 15 mil  
<sup>2</sup> 100 mesh: 5 - 8 mil, 120 mesh: 10 - 15 mil  
 Metric outlet spacing expressed in nominal length.  
 Coefficient of variation (Cv) less than 3%.  
 †While operating or flushing, pressures within laterals are not to exceed maximum pressure specification.


**Sweet Spot available in all Aqua-Traxx Azul Flow rates**

WALL THICKNESS									
Diameter	Wall Thickness	Pressure				Reel Length		Reel Weight	
		psi		bar		ft		meters	
		min	max†	min	max†	ft	meters	lbs	kg
6/8" (19mm) 0.750"	5 mil	4	10	0.3	0.7	12,000	3,658	69	31
	6 mil	4	11	0.3	0.8	8,800	2,682	61	28
	8 mil	4	15	0.3	1.0	6,600	2,011	59	27

**LENGTH OF RUN**

■ 5/8" ■ 6/8" ■ 7/8"

• Inlet Pressure = 10 psi  
 • Slope = 0%  
 • EU = 90

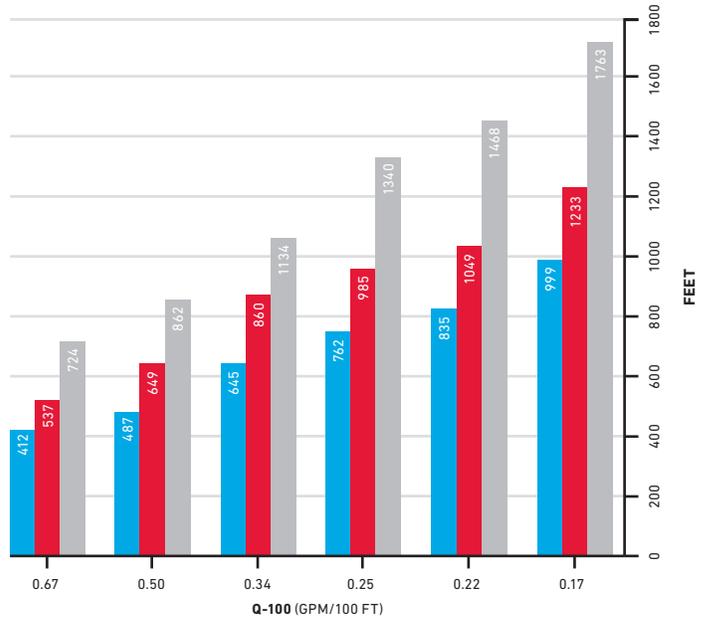



## WHEN WE SAY **COUNT ON IT**, WE MEAN IT

With an expanding population, growers around the world are looking to technologies that help increase productivity of existing land and maximize precious water resources. Toro's drip irrigation solutions help growers of permanent, field and row crops around the world realize substantial benefits in yield, quality, and water savings from the precise application of water and nutrients.

Visit [toro.com](https://www.toro.com) or call **(877) 373-0087** for more information or to find your local Toro dealer. Visit [driptips.toro.com](https://www.driptips.toro.com) to learn more about drip irrigation and how it can help your farm.

© 2022 The Toro Company.  
All Rights Reserved. Printed in the USA.

Toro Ag  
1588 N. Marshall Avenue  
El Cajon, CA 92020-1523, USA  
Tel: + (877) 373-0087 or + 1 (619) 596-2495  
Fax: +1 (800) 892-1822 or + 1 (619) 258-9973  
[toro.com](https://www.toro.com)



**Ag**

**ALT330**  
07/22

*Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, design and standard equipment without notice and without incurring obligation. See your dealer for details on all our warranties.*