

The TORO logo is displayed in white, bold, sans-serif capital letters inside a red rounded square.

# Multi Pro® 5800

300-GALLON SPRAYER

## FEATURES

- **Six Diaphragm Pump** – *An industry exclusive – this oversized pump satisfies the highest spray rates while simultaneously supplying generous agitation flow.*
- **300 gal (1,136 L) Chemical Tank** – *Ready for the long haul, this thoughtfully designed tank incorporates four, 30 degree, side-mounted agitation nozzles to ensure homogeneous mixing of chemicals for application consistency and accuracy. Polyethylene material won't crack, dent, rust, chip or peel.*
- **Powerful Kubota® Engine** – *Proven 50 hp (37.3 kW) liquid-cooled EFI gasoline engine has the power to perform in the most demanding conditions.*
- **Rugged Triangular Spray Boom** – *Three section, 20.5' (6.25 m) boom width provides fore and aft breakaway on impact while protecting nozzles. Raises into a crisscross position for storage and transportation.*
- **ExcelaRate® Rate Control System** – *Step-by-step calibration and memory of your two most commonly used rates makes applications simple and repeatable.*

## Leading technology, proven reliability, unsurpassed accuracy.

The Multi Pro 5800 is just what you would expect from the market leader in turf sprayers. We took hundreds of hours of insightful customer input and created the most advanced spray system on the market. Virtually every aspect of the spray system has been optimized for performance accuracy. We have engineered in aggressive agitation and faster response times to consistently and accurately apply desired spray rates. Extensive testing and reliable components ensure the Multi Pro 5800 is ready to perform when you need it most. Add highly productive work attachments and accessory kits to save labor and chemical costs by simplifying the mixing and spraying processes. Contact your Toro distributor to learn more, or schedule a demonstration on your course.



MULTI PRO 5800-G, MODEL 41394													
<b>ENGINE</b>	Kubota® WG1605, rated output: 50 hp (37.3 kW), 1.6 L, 4-cylinder liquid-cooled electronic fuel injection, throttle control, three-way catalytic converter, gear-driven valve train, and a diagnostic port.												
<b>COOLING SYSTEM</b>	Mid-mounted 3.3 (3.12 L) quart radiator with oil cooler mounted in front.												
<b>FUEL SYSTEM</b>	12 gallon (45 L) polyethylene/nylon low-permeation fuel tank with 1.5" (38 mm) opening on the passenger side for fueling; non-vented fuel cap with electronic fuel gauge on the console, in-tank fuel replacement filter, (unleaded gasoline), evaporative emission system with carbon cannister.												
<b>TRACTION SYSTEM</b>	Hydrostatic system driving double planetary gear reduction rear wheel drives; foot pedal control of forward/reverse ground speed.												
<b>GROUND SPEED</b>	Forward: 0-10 mph (0-16.1 km/h). Reverse: 0-4 mph (0-6.4 km/h).												
<b>TIRES</b>	Front: 23" diameter rounded profile, 4-ply rated tire with smooth tread pattern; wheel has 5-hole bolt pattern for lugs. Rear: 26.5" diameter rounded profile, 6-ply rated tire with turf tread pattern; wheel has 8-hole bolt pattern for lugs.												
<b>BRAKES</b>	2-wheel mechanical cable operated multi disc wet brakes with additional hydrostatic braking through drive train.												
<b>MAIN FRAME</b>	Welded high strength steel tubular construction.												
<b>SUSPENSION</b>	Front: straight axle with twin independent leaf springs and dual shock absorbers. Rear: rigid with high flotation rear tires.												
<b>STEERING</b>	Fully hydraulic with dedicated power source 48° steering angle.												
<b>GAUGES/INDICATORS</b>	Ignition key switch; analog spray system pressure gauge; fuel gauge; battery voltage lamp; oil pressure warning lamp; coolant temperature warning lamp; InfoCenter display console.												
<b>CONTROLS</b>	Throttle control; spray pump switch; tank agitation switch; individual boom section switches; master boom switch; speed-lock switch; manual/automatic spray mode switch; boom lift/lower switches; manual application rate control (pressure) switch; USB port; 12V power socket; ExcelaRate™ automatic spray rate control (via InfoCenter).												
<b>SEATS</b>	Bucket seats with easy tilt forward bracket; removable bolts allow for adjustment for various seat positions; seats are interchangeable from left to right.												
<b>ELECTRICAL FEATURES</b>	12 volt, 690 cold cranking amps at 0° F (-18° C). 12 volt, 60 Amp alternator. Dash mounted ignition switch.												
<b>LIGHTS</b>	Rectangular 12 volt, 37.5 watt halogen sealed beam headlights.												
<b>SOUND LEVEL</b>	90 dB(A) at operator ear under normal operation												
<b>WEIGHT</b>	Drive-on weight: 2,882 lbs. (1,307 kg), Shipping weight: 2,882 lbs. (1,307 kg), Empty vehicle: 2,882 lbs. (1,307 kg), Full w/ Operator: 5,692 lbs. (2,582 kg), MGWV: 6,692 lbs. (3,035 kg).												
<b>DIMENSIONS</b>	Measurements with spray system— <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Overall Length:</td> <td style="width: 30%;">154" (391 cm) booms forward.</td> <td style="width: 20%;">Turning Diameter:</td> <td style="width: 20%;">15'-7" (4.7 m) front tire inside</td> </tr> <tr> <td>Overall Width:</td> <td>88" (224 cm) booms forward..</td> <td></td> <td>26'-7" (8.1 m) front tire outside</td> </tr> <tr> <td>Height:</td> <td>83.5" (212 cm) to top of ROPS</td> <td></td> <td></td> </tr> </table>	Overall Length:	154" (391 cm) booms forward.	Turning Diameter:	15'-7" (4.7 m) front tire inside	Overall Width:	88" (224 cm) booms forward..		26'-7" (8.1 m) front tire outside	Height:	83.5" (212 cm) to top of ROPS		
Overall Length:	154" (391 cm) booms forward.	Turning Diameter:	15'-7" (4.7 m) front tire inside										
Overall Width:	88" (224 cm) booms forward..		26'-7" (8.1 m) front tire outside										
Height:	83.5" (212 cm) to top of ROPS												
<b>WARRANTY</b>	Two-year limited warranty. Refer to the Operator's Manual for further details.												
<b>CERTIFICATION</b>	SAE 2258 Dec. 2003 and EU 98/37EC Machinery Directive. 2014/108/EC (EMC).												

SPRAYER SPECIFICATIONS	
<b>SOLUTION TANK</b>	Elliptical, high-density, impact-resistant polyethylene with large 16" (41 cm) fill opening.
<b>RATED CAPACITY</b>	300 gallon (1,136 liter).
<b>SPRAY PUMP</b>	Hardi 364 / 10.0 6-diaphragm positive displacement; flow rate 45 gpm (170.3 lpm), 220 psi (1500 kpa) maximums.
<b>AGITATOR</b>	4, side-mounted jet agitation nozzles for full tank agitation.
<b>BOOM ASSEMBLY</b>	20.5' (6.25 m), 4 nozzles per selection, triangular truss-style open boom. 12 total triple-turret nozzle mounts with diaphragm check valves.

**A Safety Reminder:** Prior to any application, know the chemical content and the manufacturer's recommendation for protective clothing. Always wear proper clothing and mask when applying chemicals.

\*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.





# Multi Pro® 5800 Accessories

MULTI PRO 5800 ACCESSORIES	
<b>GEOLINK® PRECISION SPRAY SYSTEM</b>	Toro's exclusive turf-based GPS precision spray system featuring sub-inch accuracy, repeatable mapping, and either CDMA or GSM cellular connectivity.
<b>GEOLINK® AS</b>	Exclusively available for the Multi Pro 5800 with GeoLink. GeoLink AS enables autosteer, ensuring the optimal next pass is followed and providing the most efficient use of your sprayer.
<b>NOZZALERT™</b>	Monitors flow at each individual nozzle position, alerting the operator to flow deviations caused by worn, broken, clogged, or missing nozzles.
<b>CLEANLOAD EDUCTOR KIT</b>	This on-board mixing station allows rapid and safe loading of any chemical without the need to first mix into a slurry. Incorporates a built-in bottle wash feature and has an optional suction lance to draw liquid or powder products from their container. Stores within the width of the spray vehicle for transport.
<b>FRESH WATER RINSE KIT</b>	30 Gallons (114 L). Nesting inconspicuously behind the main tank, this system includes a separate electric diaphragm pump, dedicated plumbing and dual rinse nozzles. At 10 gallons (38 l) per cycle, it has on-board capacity to complete a triple rinse process, saving precious time.
<b>ELECTRIC HOSE REEL KIT</b>	150' (45.7 m) of 0.5" (13 mm) hose for hand or walk spraying applications. Convenient electric powered rewind. Spray gun has an adjustable nozzle from stream to fan.
<b>PRO FOAM MARKING KIT</b>	Foam dollops ensure accurate parallel path tracking. Select foam for either boom or both.
<b>PRO FOAM</b>	1 gallon (3.8 L) bottle of Pro Foam Concentrate.
<b>HAND SPRAY WAND KIT</b>	Spray manually using handheld device for precision and accuracy.
<b>ULTRA SONIC BOOM LEVELING KIT</b>	Sonar sensors automatically maintain proper boom height over undulating turf for consistent and proper spray pattern.
<b>DRIFT REDUCTION BOOM SHROUD</b>	Extends 12" (30.5 cm) below the boom to minimize chemical drift in breezy conditions while retaining full boom system functionality.
<b>SUNSHADE</b>	Hard shell sunshade canopy w/windshield option. (From Custom Products of Litchfield, 1-800-CAB-LINE, <a href="http://www.cozycab.com/cabs">www.cozycab.com/cabs</a> ).
<b>FULLY ENCLOSED CAB</b>	Full-view operator safety cab with AC, wiper and mirror options. (From Custom Products of Litchfield, 1-800-CAB-LINE, <a href="http://www.cozycab.com/cabs">www.cozycab.com/cabs</a> ).
<b>AIR CONDITIONER</b>	Custom Products of Litchfield, 1-800-CAB-LINE, <a href="http://www.cozycab.com/cabs">www.cozycab.com/cabs</a> .
<b>AIR INDUCTION TURBO TWIN JET NOZZLES</b>	Exclusive to Toro in the 0.8 gpm (3.02 lpm), 1.0 gpm (3.79 lpm) and 1.5 gpm (5.68 lpm) sizes, for exceptional contact coverage.
<b>CONTACT &amp; SYSTEMIC NOZZLES</b>	Select the right nozzle for your application by using the <b>Multi Pro Nozzle Selection Brochure</b> - available via <a href="http://Toro.com">Toro.com</a>

**A Safety Reminder:** Prior to any application, know the chemical content and the manufacturer's recommendation for protective clothing. Always wear proper clothing and mask when applying chemicals.

\*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.





# GeoLink® Precision Spray System Specifications

TOPCON AGS-2 RECEIVER	
<b>DIMENSIONS (H x W x D)</b>	2.1" (53 mm) x 5.2" (130.5 mm) x 5.4" (136.5 mm)
<b>POSITIONING SYSTEM</b>	Real-time Kinematic (RTK). Optional PPP (Precise Point Positioning) as fallback for RTK
<b>CONSTELLATIONS</b>	GPS, GLONASS, GALILEO, BeiDou, QZSS
<b>POWER</b>	9-28 VDC
<b>COMPLIANCE</b>	J1939 and ISO11783
<b>WEATHER RESISTANCE</b>	Achieved IP69K rating


TOPCON XD+ DISPLAY	
<b>DISPLAY</b>	12.1" (307mm) 1280 x 800 px. TFT Color Graphic LCD with LED backlight
<b>DIMENSIONS</b>	8.4" x 13" (214 mm x 330 mm)
<b>POWER</b>	9V - 36V input (voltage and polarity protected).
<b>OPERATING SYSTEM</b>	Linux with icon-based GeoLink software. NXP I.MX6®, quad core, 1GHz processor, Mass storage: 8GB, RAM: 1GB
<b>FEATURES</b>	Machine-to-machine communication, multiple inclusion zones, easy and standard modes, configurable with multi-view capabilities, interactive keypad, on-demand mini views and expandable views, 28 languages, rear-facing speaker, multiple application control, ISO UT ready, remote capable.
<b>WEATHER RESISTANCE</b>	Achieved IP67 rating

ACCESSORIES	
<b>GEOLINK® AS</b>	Exclusively available for the Multi Pro 5800 (Model 41394) with GeoLink. GeoLink AS enables autosteer, ensuring the optimal next pass is followed and providing the most efficient use of your sprayer.
<b>REFERENCE ANTENNA KIT</b>	GeoLink Precision Spray System reference antenna kit.

## Key Benefits of GeoLink Precision Spray System:

- Universal CL-55 cellular modem, capable of connecting to multiple cellular providers
- Use multiple machines for a single job with Machine-to-Machine communication
- Software for turf, not agriculture
- Repeatable sub-inch location accuracy
- Flexible, customizable and easy to use
- Intuitive icon-based menus
- Multiple inclusion zones – group like areas into a single job
- Improved consistency – less dependence on operator skill level

RTK: Real Time Kinematic (RTK) satellite correction is a technique used to enhance the precision of position data derived from satellite-based positioning systems, being usable in conjunction with all positioning platforms.

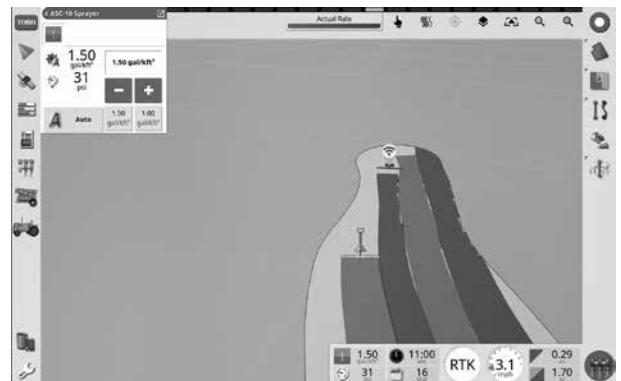

GeoLink's individual nozzle control saves time and money.

\*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.

